



Logica

High protection class emergency luminaire: Casing with rounded contours and a clear cover with click fasteners. Lighting control is provided by a highly reflective aluminium reflector.

Versions for surface/recessed wall mounting (solid walls) and for surface ceiling mounting or with additional accessories for recessed ceiling mounting (hollow ceilings).



Mounting types




Technical data

Mounting options:
surface/recessed wall mounting (IP65), surface/recessed ceiling mounting (IP40)

Body:
polycarbonate, grey (RAL 7035)

Cover:
polycarbonate, clear

Reflector:
polycarbonate, aluminium coated, specular



Decentralized supply

Protection class: III

Mains supply:
24 V +/- 20% DC

Battery supply:
24 V +/- 20% DC

Ambient temperature:
-20 to +40 °C

Central supply

Protection class: I

Mains supply:
198V-254V/50Hz

Battery supply:
176 V-276V

Ambient temperature:
-20 to +40 °C

Decentralized / Central supply



Surface wall mounting, surface ceiling mounting for illumination of exit route and areas

TB16032	TB16033	TB16034	30	6W	600lm	10.0 VA / 8.0 W
---------	---------	---------	----	----	-------	-----------------

Please order mounting accessories separately


Order code	Description
FB12193	Kit for recessed mounting in hollow wall or ceilings

Please order additional accessories separately


Order code	Description
12194	Wire guard (surface wall and ceiling mounting)

Fitting supplied complete with


FB12198	Box for recessed mounting
----------------	---------------------------

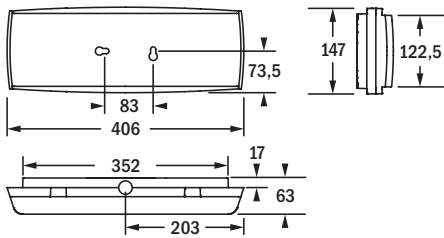

surface wall/ceiling mounting

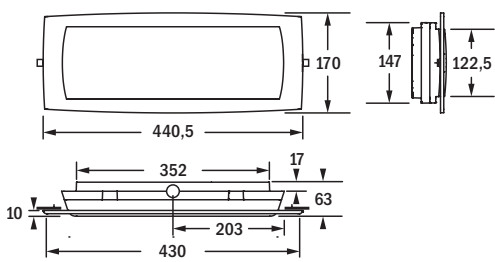

recessed wall/ceiling mounting (hollow wall / ceiling)

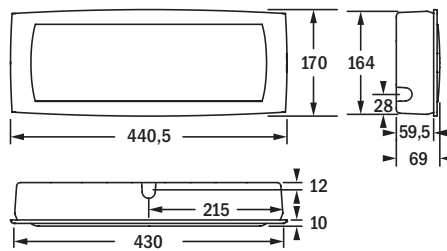

recessed wall / ceiling mounting (solid wall or ceiling)
wall / ceiling cutout 430 mm x 165 mm