

INVERTER LED Plug&Light IP65 BEGHELLI

IP65

SELV

230V-50Hz

Tc 70°C

ta 0÷50°C

Beghelli

CSQ



CSQ

ISO 9001

ISO 14001

ISO 45001

www.beghelli.com
BEGHELLI S.p.A. - Via Mozzeghine 13/15 - 40053 Loc. Monteveglio - Valsamoggia (BO) - Tel. + 39 051 9660411 - Fax +39 051 9660444 - N° Verde 800 626626

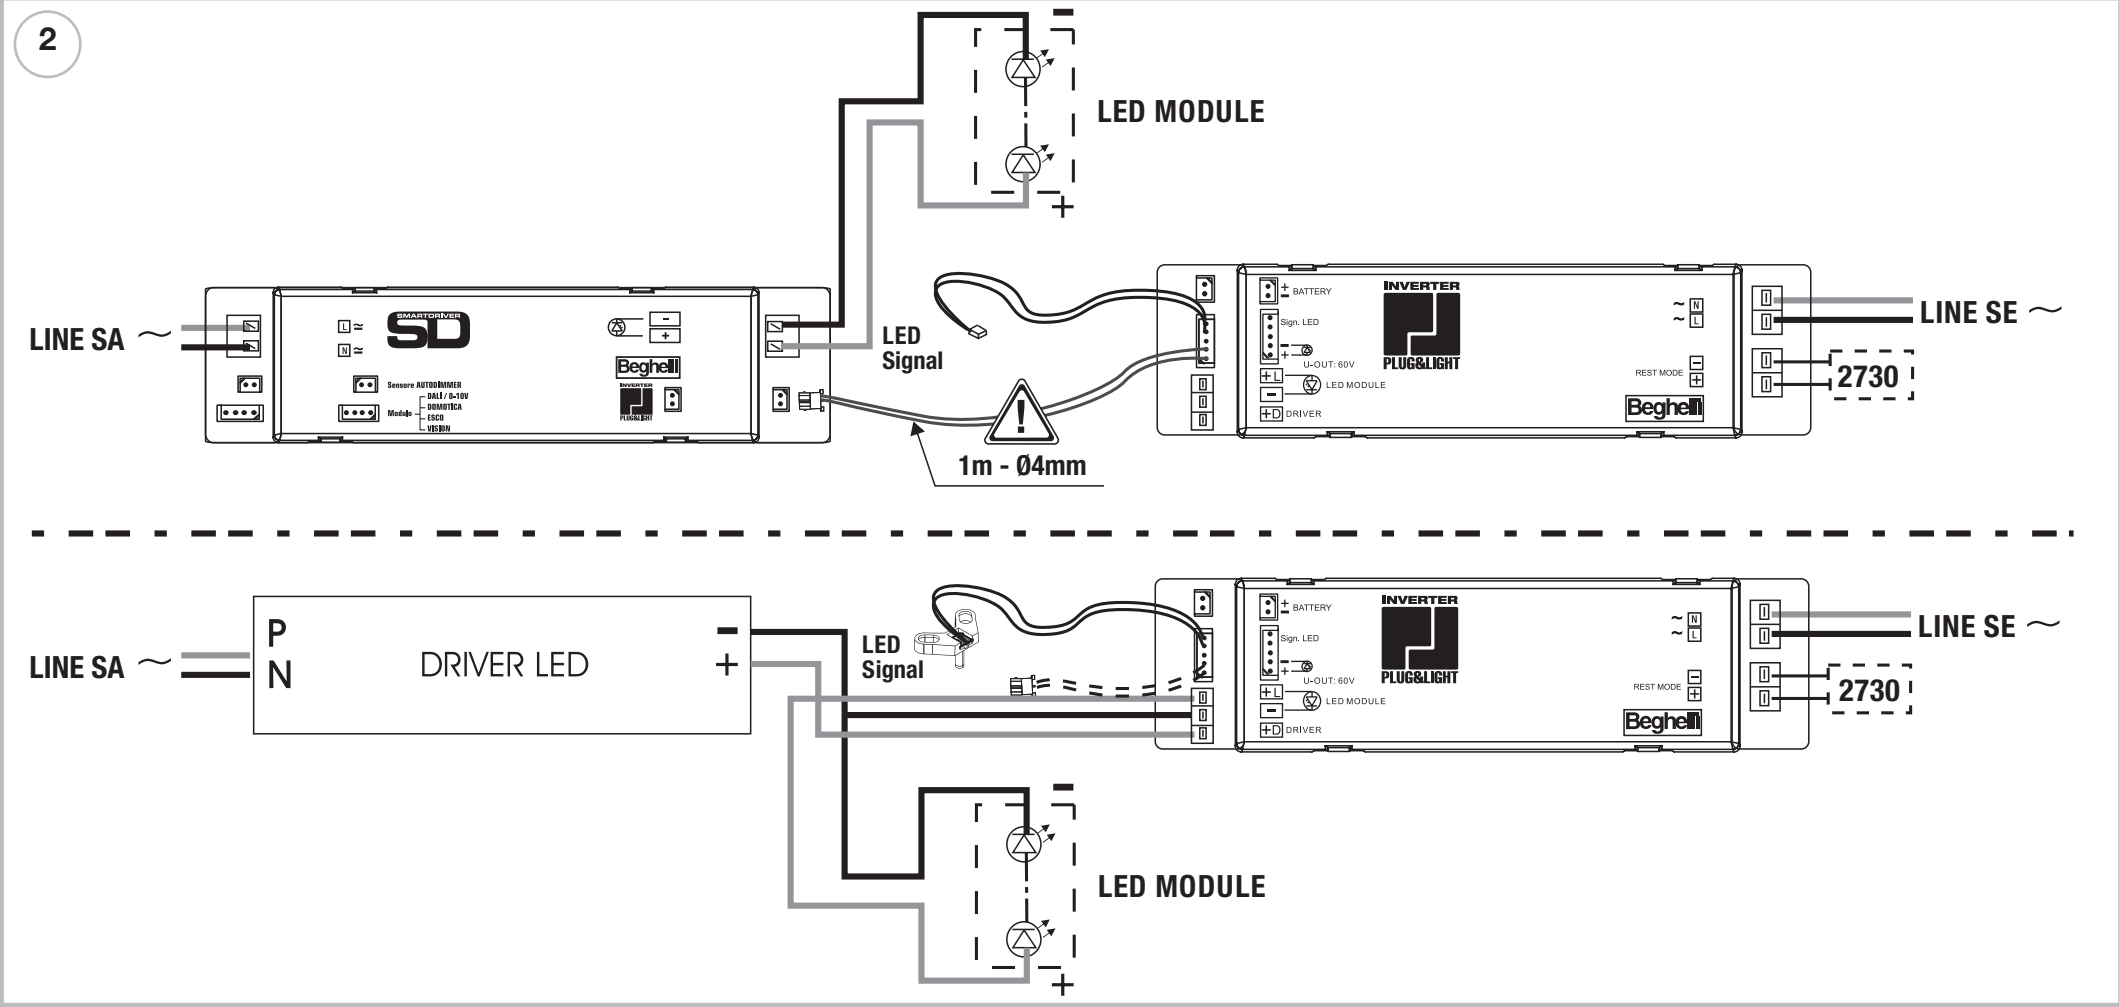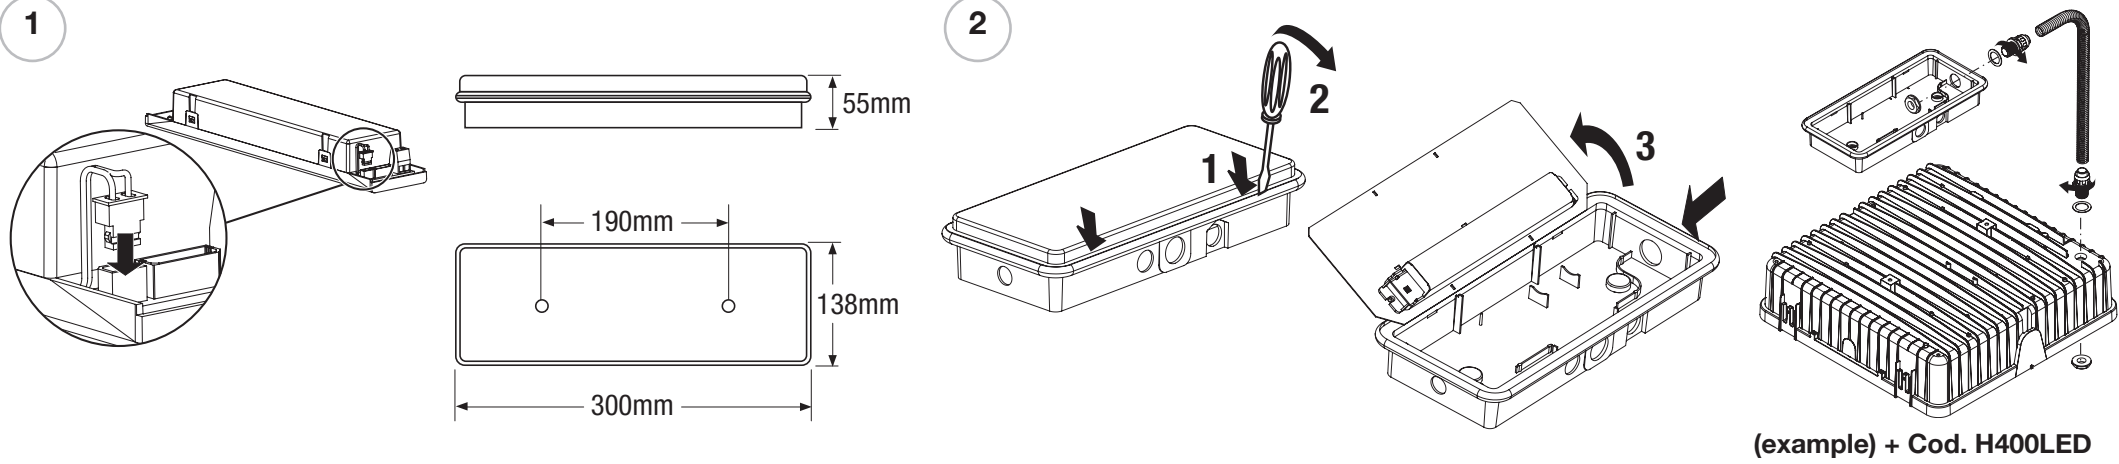


FLUSSO IN EMERGENZA - EMERGENCY OUTPUT FLUX

$$F_{out} = \frac{F_n}{P_n \times 0,9} \times P_{out}$$

F_{out} = Flusso in uscita in emergenza (lm) - *Flux output in emergency mode (lm)*
 F_n = Flusso Nominale del prodotto (lm) - *Nominal flux product (lm)*
 P_n = Potenza Nominale assorbita dal prodotto (W) - *Nominal power absorbed by the product (W)*
0,9 = Coefficiente efficienza Inverter (EU 874/2012) - *Coefficient of efficiency of the inverter (EU 874/2012)*
 P_{out} = Potenza Nominale Inverter (W) - *Nominal power Inverter (W)*

Es:
 $F_n = 7500lm$
 $P_n = 59W$ → $F_{out} = \frac{7500}{59 \times 0,9} \times 3 = 424lm$

Ord. Code	230V 50Hz	COS φ	P out		
19368	15mA	0,38	3W	NIMH 7,2V 1,5Ah	3h

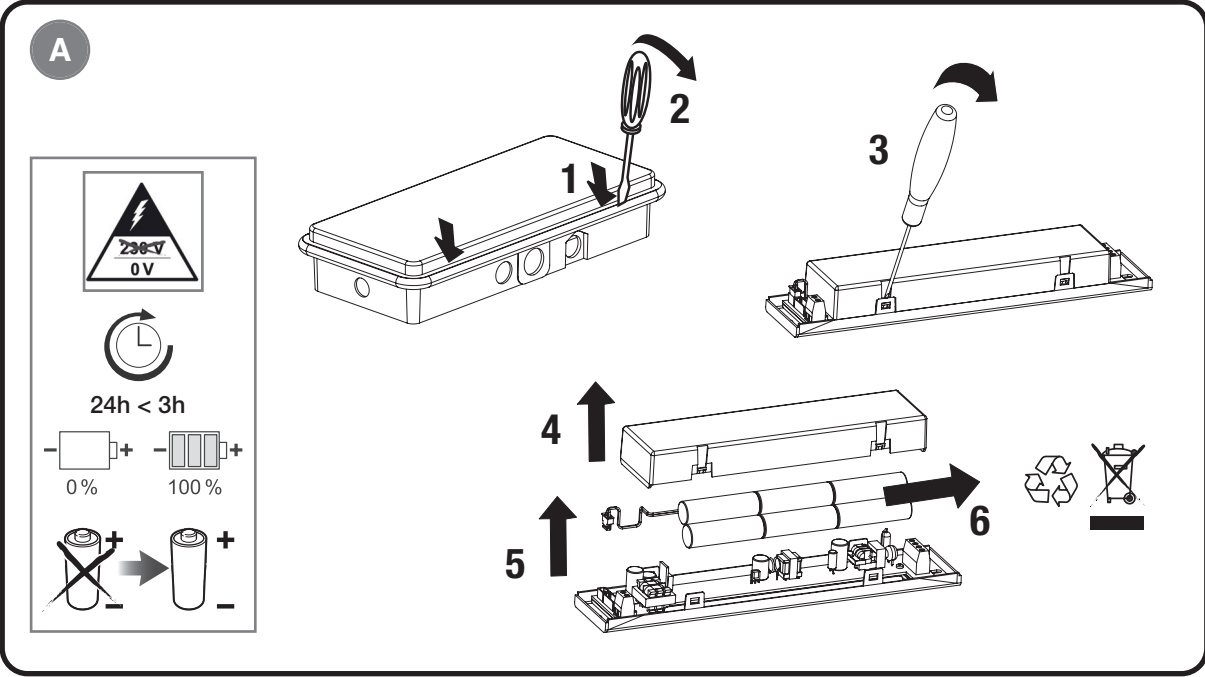

ALIMENTATORE ELETTRONICO PER ILLUMINAZIONE D'EMERGENZA CON BATTERIE ERMETICHE RICARICABILI

ISTRUZIONI PER L'INSTALLAZIONE
Posizionare il dispositivo lontano da fonti di calore: rispettare le indicazioni generali di installazione.

SCHEMI DI COLLEGAMENTO
(Fig. 2)SE - Illuminazione non permanente
SA - Illuminazione permanente
Per porre l'apparecchio in "modo riposo", fare riferimento alle istruzioni del telecomando Inibit (Cod. Ordine 2730).
Per il collegamento di Inverter con i principali modelli di Driver LED, interpellare il Servizio Tecnico Beghelli al numero: 800 626626.

ALIMENTATORE ELETTRONICO PER ILLUMINAZIONE D'EMERGENZA CON BATTERIE ERMETICHE RICARICABILI

SEGNALAZIONI LED
VERDE FISSO BATTERIA IN RICARICA
ROSSO FISSO BATTERIA SCOLLEGATA

CARATTERISTICHE TECNICHE

- I OUT Max: 160mA
- V OUT: 20÷55V SELV
- Tempo di ricarica: 24 ore

AVVERTENZE - GARANZIA
- Questo apparecchio dovrà essere destinato solo all'uso per il quale è stato costruito. Ogni altro uso è da considerarsi improprio e pericoloso.
- Per l'eventuale sostituzione di batterie o altre riparazioni rivolgersi ad un centro di assistenza tecnica autorizzato e richiedere l'utilizzo di ricambi originali. Il mancato rispetto di quanto sopra può compromettere la sicurezza dell'apparecchio.

ELECTRONIC EMERGENCY LIGHTING CONVERSION KIT

INSTRUCTIONS FOR INSTALLATION
Place the battery pack as far as you can from the heating sources (such as the ballast).

SA - Mantained
Chcete-li nastavit zařízení v klidové režimu, postupujte podle pokynů Inibit dálkového ovladače (objednací kód 2730).
Contact your local authorised dealer for the connection instructions of Beghelli electro-inverters to the main models of Driver LED.

ELECTRONIC EMERGENCY LIGHTING CONVERSION KIT

LED SIGNALS
FIXED GREEN BATTERY CHARGING
FIXED RED BATTERY DISCONNECTED

TECHNICAL SPECIFICATIONS

- I OUT Max: 160mA
- V OUT: 20÷55V SELV
- Recharging time: 24 hour

WARNINGS - GUARANTEE
- This device shall be used exclusively for the purpose for which it has been designed. Any other use is considered improper and therefore dangerous.
- Contact an authorised technical service centre for the replacement of batteries and for any other repairs possibly required use only original spare parts.
The lacked respect of the above conditions may compromise the safety of the device.

