

S-In

Emergency luminaire for steps: Housing made of aluminium with frame or shade cover, exchangeable. Recessed mounting casing for solid steps included in delivery.

Version for recessed step mounting.



300

Technical data

Mounting options:
installation in stairs

Body: aluminium, grey (RAL 7030)

Cover: diecast aluminium, grey (RAL 7030)

Display pane: glass, opal

Decentralized supply

Protection class: III

Mains supply:
24 V +/- 20% DC

Battery supply:
24 V +/- 20% DC

Ambient temperature:
-20 to +40 °C







Central supply

Protection class: I

Mains supply:
198V-254V/50Hz

Battery supply:
EVG: 110V - 276V
Sleb/Alog: 176V - 276V

Ambient temperature:
-20 to +40 °C

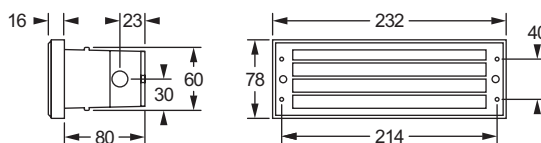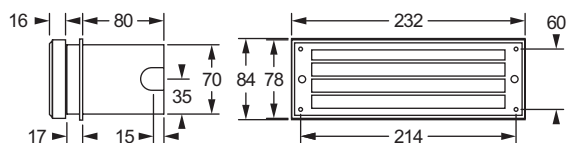

installation in stairs (solid stairs)

installation in stairs (hollow stairs)


Order Codes

Decentralized / Central supply


SICURO S24	[EVG]	[SLEB]	[ALOG]	LED	P	Φ	P =	S ~	P =
-------------------	-------	--------	--------	-----	---	---	-----	-----	-----

Installation in stairs for illumination of exit route and areas

T93290-S24	T93290E	T93290S	T93290A	3	3.0W	29lm	134lm	4.3 W	8.0VA / 5.0 W
------------	---------	---------	---------	---	------	------	-------	-------	---------------

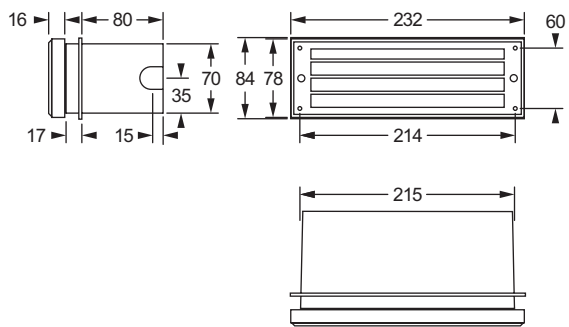

installation in stairs (hollow stairs)

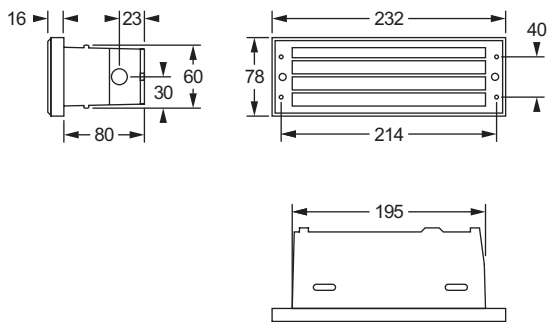

installation in stairs (solid stairs)