
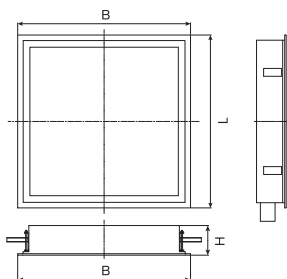
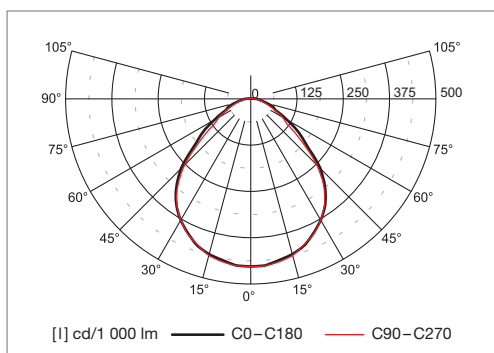


Lyra W LED

Recessed LED luminaires – universal mounting into ceiling modules M600 and plaster ceilings

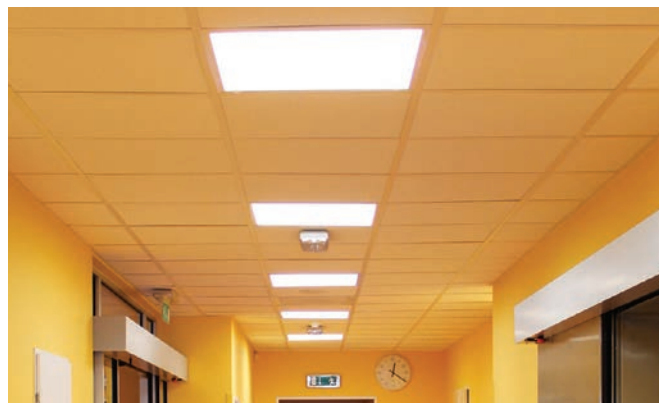

Material:

- body: steel sheet finished by powder technology varnishing
- color: white RAL 9003
- diffuser: microprismatic optics

Degree of protection: IP20

Rated voltage: 230 V/50 Hz

Control gear: LED driver


Mounting: universal mounting in ceiling module M600 and plaster ceiling

Accessories: (to be ordered separately)


99-298 – steel holders for mounting in M600 module and plaster ceiling (4 pcs)

Application: computer labs, large and small offices, lecture halls

MOUNTING IN PLASTER CEILING

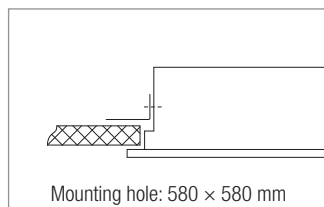

MOUNTING IN MODULE M600

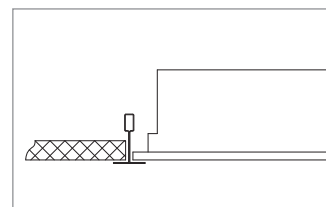

Power* W	Code	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	L x B x H (mm)	Kg
4x14	32-929/414/NW	44	3880	88	4000	>80	595 x 595 x 60	5.0
4x14	32-929/414/TW	44	3880	88	4000	>80	595 x 595 x 60	5.0

* Indicative power just for fluorescent fixtures comparison purpose

N – LED driver

T – LED driver dimmable DALI

M – frosted acrylic, X – prismatic and Z – opaline diffuser on request