

Salemo LED

Recessed LED luminaires – mounting into ceiling modules M600



Material:

- body: steel sheet finished by powder technology varnishing
- color: white RAL 9003
- diffuser: frosted acrylic or microprismatic optics



Degree of protection: IP40/20

Rated voltage: 230 V/50 Hz


Control gear: LED driver

Mounting: mounting in ceiling module M600

Application: computer labs, large and small offices, lecture halls

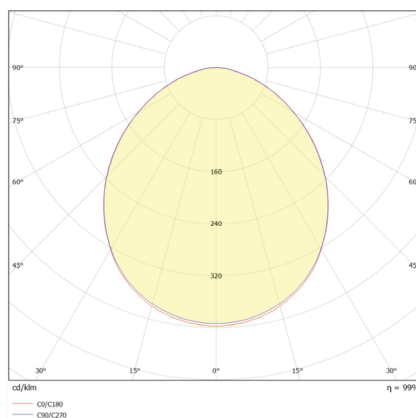


Micro-prism optic system M

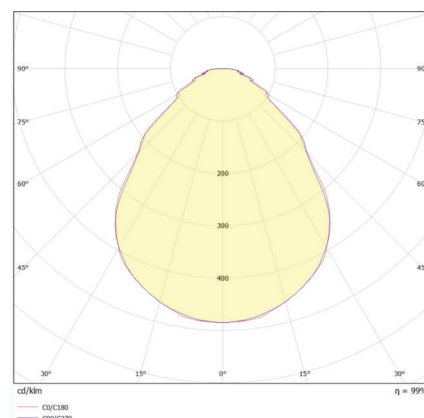

Frosted diffuser W

MOUNTING IN MODULE M600



Code	Optics	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	L × B × H (mm)	Kg
A37-10120CM	frosted diffuser	42	5 700	135	4 000	>80	595 × 595 × 60	5,0
A37-10120CW	micro-prism optic system	42	5 400	128	4 000	>80	595 × 595 × 60	5,0