
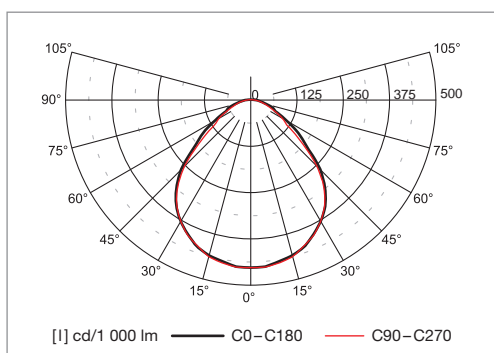


# Salemo LED

Recessed LED luminaires – mounting into ceiling modules M600

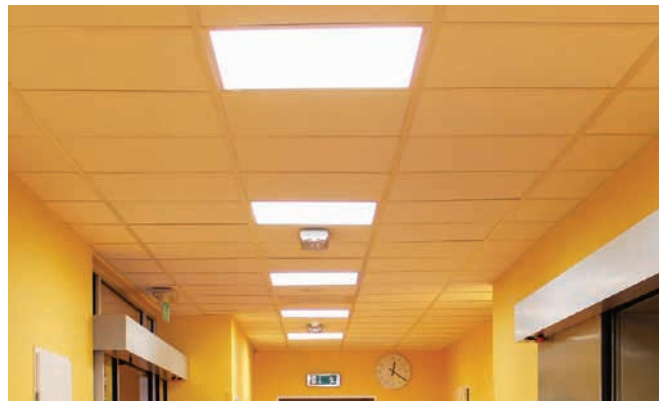

## Material:

- body: steel sheet finished by powder technology varnishing
- color: white RAL 9003
- diffuser: frosted acrylic or microprismatic optics


**Degree of protection:** IP40/20

**Rated voltage:** 230 V/50 Hz


**Control gear:** LED driver

**Mounting:** mounting in ceiling module M600

**Application:** computer labs, large and small offices, lecture halls

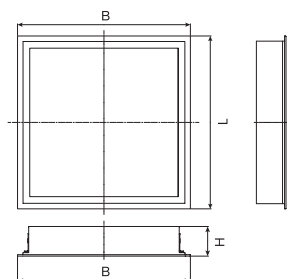

## MOUNTING IN MODULE M600

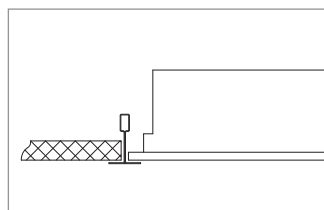

Code	Optics	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	EEC	L × B × H (mm)	Kg
A37-10140CM	frosted diffuser	56	5 300	95	4 000	>80	A+	595 × 595 × 60	5,0
A37-10140CW	micro-prism optic system	56	5 200	93	4 000	>80	A+	595 × 595 × 60	5,0
A37-10153CM	frosted diffuser	65	7 100	109	4 000	>80	A+	595 × 595 × 60	5,0
A37-10156CM	frosted diffuser	93	10 000	108	4 000	>80	A+	595 × 595 × 60	5,0
A37-10157CM	frosted diffuser	117	12 500	107	4 000	>80	A+	595 × 595 × 60	5,0