



Stile In


emergency



IP40
IK05
850°
□
Batt. LiFe +40°C / 0°C
Batt. Pb +40°C / 0°C

 Luminaire designed for recessed mounting, with an autonomy of up to more than 8 hrs.

 The extensive range of accessories allows one luminaire to be used for recessed, edge mounting and plasterboard applications.


 For recessed mounting, a box is provided; for ceiling mounting, the housing is pre-fitted with several pre-drilled inlets to allow the entry of wire ways from all directions.

Applications

Services, commercial activities, shops, restaurants, offices

Characteristics

- Power supply** 230VAC ± 10%, 50÷60Hz
- Mounting** Wall, ceiling, recessed, false ceiling, edge mounting
- Recharging time** 12h with LiFe battery
- Housing** Polycarbonate, white RAL 9003
- Optics** symmetrical, polycarbonate, white
- Screen** Clear polycarbonate
- Compliance** EN 60598-1, EN 60598-2-2, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

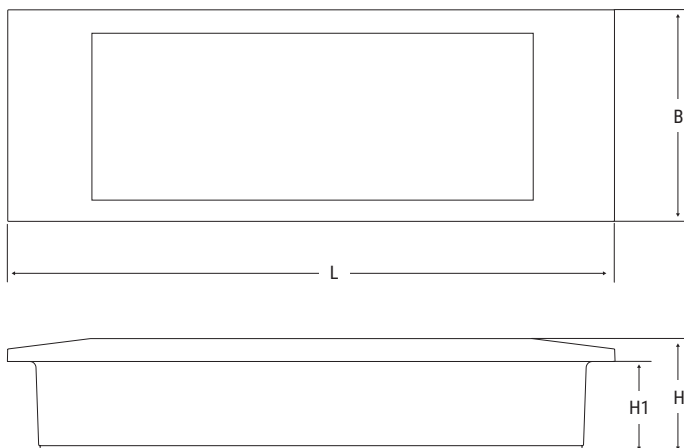


Dimensions mm				Distance of visibility (DV)	
L	B	H	H1	screen	edge mounting
292	102	55.5	44.5	15m	20m

Performance according to EN 1838


Height (m)	Centre distance (m) ESCAPE ROUTES		Illuminated surface area (m) LARGE AREAS	
	Wall	Ceiling	Wall	Ceiling
2.5	5	-	3x3	-
3	-	7	-	5x5
Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40			Lighting >0.5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire Order Code 1499L 130 lm			Maintenance coefficient 0.8	

STILE IN 1499, 1499-24

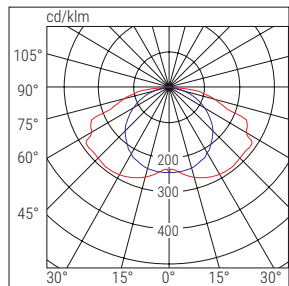

■ C90-C270 ■ C0-C180


STILE IN 1499L

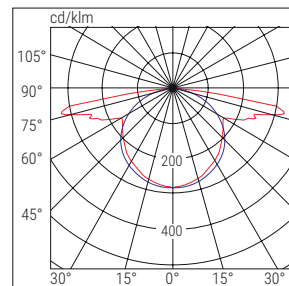

■ C90-C270 ■ C0-C180

	Order Code	W eq.	Description	Version	Autonomy h	Battery	FLUX SE lm	FLUX SA lm	Input power		Weight Kg	Packaging Single/Multi pack	Conform.
									DC	AC			
TR	1499	8	STILE IN LED 11 SE 8P	SE	8	Pb 4V 3Ah	130	-	2W		0.7	12	STANDARD
	1499/24	8	STILE IN LED 24 SE 6P	SE	6	Pb 4V 3Ah	200	-	2W		0.8	12	
	1499L	11	STILE IN LED 11 SE8 LI-FE	SE	8	LiFe 3.2V 3Ah	130	-	2W		0.4	12	

ACCESSORIES - included

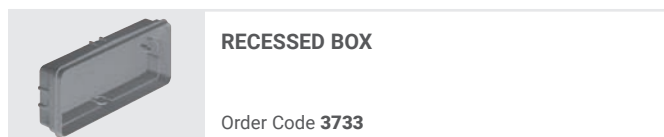

ACCESSORIES - to be ordered separately

