
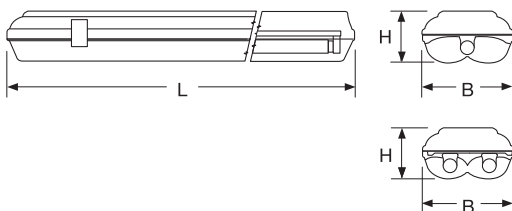


# Leader | BS111

Industrial luminaires T5 (white varnished steel sheet reflector)

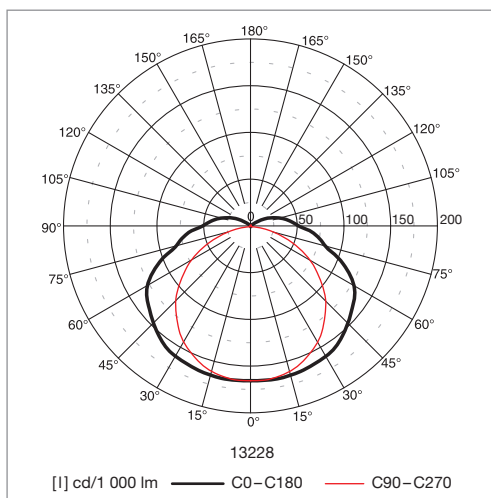

Code	Power	Lamp	Cap	L × B × H (mm)	Kg
13114	1×14W	T5	G5	674 × 121 × 82	1.9
13124	1×24W	T5	G5	674 × 121 × 82	1.9
13128	1×28W	T5	G5	1264 × 121 × 82	2.6
13135	1×35W	T5	G5	1564 × 121 × 82	3.5
13149	1×49W	T5	G5	1564 × 121 × 82	3.5
13154	1×54W	T5	G5	1264 × 121 × 82	2.6
13180	1×80W	T5	G5	1564 × 121 × 82	3.5
13214	2×14W	T5	G5	674 × 121 × 82	2.0
13224	2×24W	T5	G5	674 × 121 × 82	2.0
13228	2×28W	T5	G5	1264 × 121 × 82	3.1
13235	2×35W	T5	G5	1564 × 121 × 82	4.2
13249	2×49W	T5	G5	1564 × 121 × 82	4.2
13254	2×54W	T5	G5	1264 × 121 × 82	3.1

Note: The luminaires are supplied in a package minimum 3 pieces or multiple (with the exception of emergency versions).

The luminaires are supplied including plastic clips and without lamps.

Version with inverter – TR (example: code 13128 becomes 13128TR)

### Material:

- body: injection molded, self-extinguishing UV-stabilized polycarbonate
- color: gray RAL 7035
- reflector: white varnished steel sheet
- diffuser: clear polycarbonate

**Degree of protection:** IP65

**Rated voltage:** 230 V/50 Hz

**Control gear:** electronic ballast with the highest energy savings.

Dimmable ballasts and fast connectors Wieland or MPM are on request. The luminaires are offered in emergency version (with the exception of 14W, 24W and 2×54W).

**Mounting:** on ceilings, suspension on chain pendants

**Application:** washrooms, factory halls, farms, cellars, store houses

The luminaires can be used in covered outdoor areas.