

Recessed luminaires IP65 - universal mounting



Material:

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003
- cover: prismatic

Degree of protection: IP 65


Rated voltage: 230V/50Hz

Control gear: low loss ballast or electronic ballast, dimmable ballast by request; the luminaires are offered also in emergency version

Mounting: ceiling systems M625 - universal mounting and mounting in plaster ceilings

Accessories: steel holders (are components of the luminaires)

Application: hospitals, laboratories, precincts with high humidity and dustiness, precincts demanding high sanitary codes, operating theaters

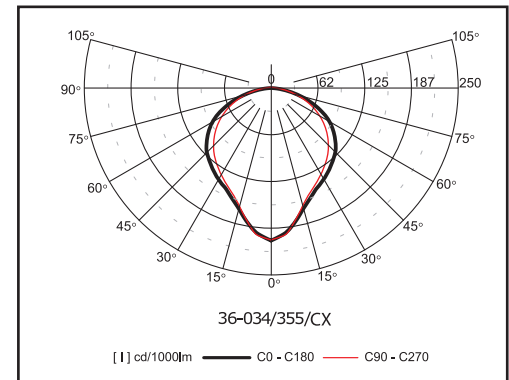

Code	Power	Lamp	Cap	LxBxH (mm)	Hole cut out (mm)	Module	Kg
36-033/136/□X	1x36W	T8 lamp	G13	1247x311x100	1215x297	M625	7,7
36-033/158/□X	1x58W	T8 lamp	G13	1547x311x100	1515x297	M625	8,2
36-033/236/□X	2x36W	T8 lamp	G13	1247x311x100	1215x297	M625	7,5
36-033/258/□X	2x58W	T8 lamp	G13	1547x311x100	1515x297	M625	9,0
36-033/418/□X	4x18W	T8 lamp	G13	622x622x122	591x608	M625	8,7
36-034/336/□X	3x36W	comp. fl. lamp	2G11	622x622x122	591x608	M625	8,1
36-034/355/CX	3x55W	comp. fl. lamp	2G11	622x622x122	591x608	M625	8,1
36-033/128/CX	1x28W	T5 lamp	G5	1247x311x100	1215x297	M625	7,7
36-033/135/CX	1x35W	T5 lamp	G5	1547x311x100	1515x297	M625	8,2
36-033/228/CX	2x28W	T5 lamp	G5	1247x311x100	1215x297	M625	7,5
36-033/235/CX	2x35W	T5 lamp	G5	1547x311x100	1515x297	M625	9,0
36-033/414/CX	4x14W	T5 lamp	G5	622x622x122	591x608	M625	8,7

