



# Kubus

**Exit sign luminaire:** Casing made of flat sheet steel profiles with angular contours. Additional light output in the case of wall mounting. Single or double-sided escape route signage is provided thanks to exchangeable inserts.

Versions for wall mounting or with accessories for ceiling mounting, wire or rod suspension mounting, mounting on brackets and chain/cable mounting



Mounting types



Mounting types with accessories



## Technical data

Mounting options:  
surface wall mounting, surface ceiling mounting, suspension,  
bracket suspension, chain or wire

Body:  
sheet steel, white (RAL 9003)

Display pane:  
methacrylate, printed

## Decentralized supply

Protection class: III

Mains supply:  
24 V +/- 20% DC

Battery supply:  
24 V +/- 20% DC

Ambient temperature:  
-20 to +40 °C

## Central supply

Protection class: I

Mains supply:  
198V-254V/50Hz

Battery supply:  
EVG: 110V - 276V

Sleb/Alog: 176V - 276V

Ambient temperature:  
-20 to +40 °C

## Decentralized supply / Central supply



Surface wall mounting (single faced indication)

T93010-S24	T93010E	T93010S	T93010A	21m	24	1.6W		2.2W	5.0 VA / 3.0 W
T93011-S24	T93011E	T93011S	T93011A	34m	48	3.2W		4.3W	7.0 VA / 5.4 W
T93012-S24	T93012E	T93012S	T93012A	56m	48	3.2W		4.3W	7.0 VA / 5.4 W

Surface ceiling mounting, recessed ceiling mounting, suspension, bracket suspension (double faced indication)<sup>1</sup>

T93013-S24	T93013E	T93013S	T93013A	21m	24	1.6W		2.2W	5.0 VA / 3.0 W
T93014-S24	T93014E	T93014S	T93014A	34m	48	3.2W		4.3W	7.0 VA / 5.4 W
T93015-S24	T93015E	T93015S	T93015A	56m	48	3.2W		4.3W	7.0 VA / 5.4 W

<sup>1</sup> For recessed ceiling mounting, wire and rod suspension and bracket suspension, please order accessories separately.

**Please order mounting accessories separately**


Order code			Description
VD 21m	VD 34m	VD 56m	
F95057	F95057	F95057	Adaptor for ceiling mounting
F95600	F95600	F95600	Rectangular suspension: 250 mm
F95601	F95601	F95601	Rectangular suspension: 500 mm
F95602	F95602	F95602	Rectangular suspension: 1000 mm
F95401	F95401	F95401	Wire suspension: max. 1200 mm
F95055	F95056	F95070	Bracket suspension
F95400	F95400	F95400	Suspension rod: 500 mm
F95067	F95067	F95067	Adaptor for chain or wire suspension

**Please order exit sign accessories separately**


Order code			Description	
VD 21m	VD 34m	VD 56m		
E16620M	E16640M	-	Exit sign pane	
E16622M	E16642M	-	Exit sign pane	
E16621M	E16641M	-	Exit sign pane	
E16623M	E16643M	-	Exit sign pane	
E16604M	E16608M	E16134M	Exit sign pane	
E16605M	E16609M	E16135M	Exit sign pane	
E16606M	E16610M	E16136M	Exit sign pane	
E16607	E16611	E16234	Opal plastic pane	
E16242	E16241	E16251	Metal sheet painted in body color	

**Please order additional accessories separately**


VD 21m	VD 34m	VD 56m	Description
F95032	F95032	-	Wire guard (surface wall mounting)

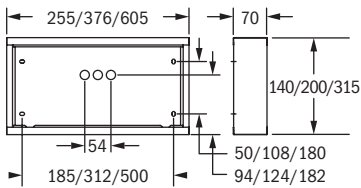


surface wall mounting

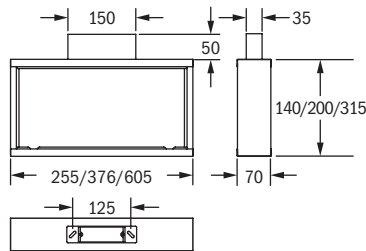


surface ceiling mounting

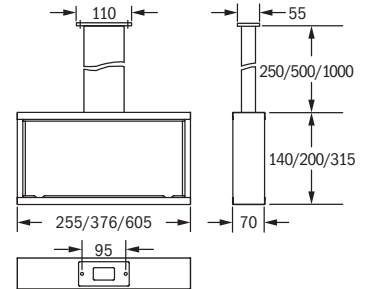


rectangular suspension

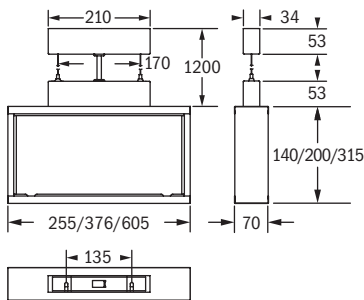


wire suspension

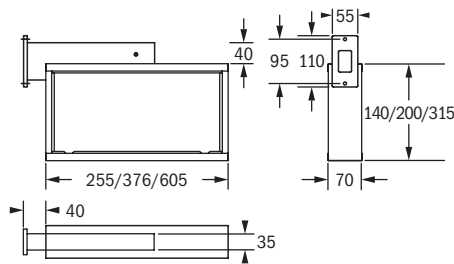

bracket suspension

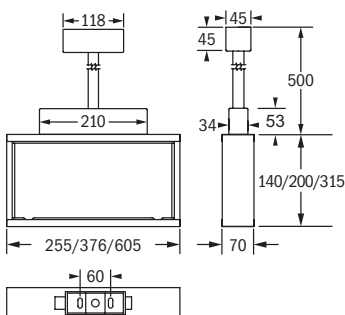

suspension rod

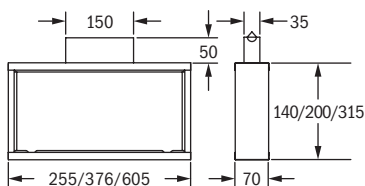

for chain or wire suspension