

Aestetica



Exit sign luminaire: Casing has a compact design with planar light-emitting surface and a clear insert. Lighting control is provided by a plastic reflector. Single-sided escape route signage is provided thanks to exchangeable display films, double-sided escape route signage is provided by exchangeable display inserts.

Versions for surface wall mounting and surface ceiling mounting or with additional accessories for recessed wall mounting (solid walls), recessed ceiling mounting (hollow ceilings) and bracket suspension mounting.



Mounting types



Mounting types with accessories



Technical data

Mounting options:

surface or recessed wall mounting, surface or recessed ceiling mounting, bracket suspension

Body: polycarbonate, white (RAL 9003)

Cover: polycarbonate, clear

Reflector: polycarbonate, white

Display pane: methacrylate, printed

Decentralized supply

Protection class: III

Mains supply:
24 V +/- 20% DC

Battery supply:
24 V +/- 20% DC

Ambient temperature:
-10 to +40 °C

Central supply

Protection class: II

Mains supply:
198V-254V/50Hz

Battery supply:
EVG: 110V - 276V
Sleb/Alog: 176V - 276V

Ambient temperature:
-10 to +40 °C

Decentralized supply / Central supply



Surface or recessed wall mounting (single faced indication), surface or recessed ceiling mounting (double faced indication), bracket suspension¹ (double faced indication)

TB93230-S24	TB93230E	TB93230S	TB93230A	15/20m 20	1.4W	2.0W	4.5VA 2.5W
-------------	----------	----------	----------	-----------	------	------	------------


¹ For recessed wall / ceiling mounting in cavity walls or hollow ceilings, please order required accessories separately.

Please order mounting accessories separately


Order code	Description
FB4265	Bracket suspension
FB3733	Kit for recessed mounting in solid wall or ceilings
FB4266	Kit for recessed mounting in hollow wall or ceilings

Please order exit sign accessories separately

Order code	Description	
VD 15m	VD 20m	
EB16237M	Exit sign film	
EB16235M	Exit sign film	
EB16236M	Exit sign film	
EB16234M	Exit sign display-pane	
EB16233M	Exit sign display-pane	

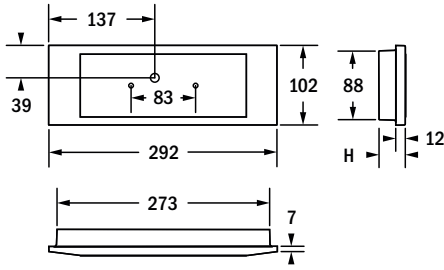


surface wall mounting

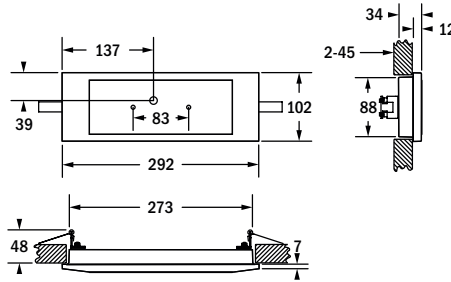


recessed wall mounting (hollow wall)


wall cutout:
278 x 92mm

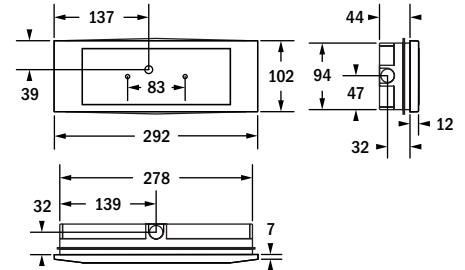

recessed wall mounting (solid wall)

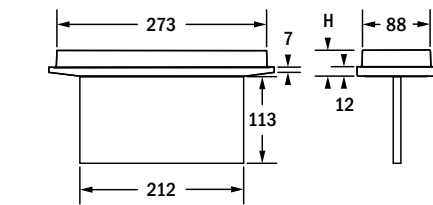


surface ceiling mounting




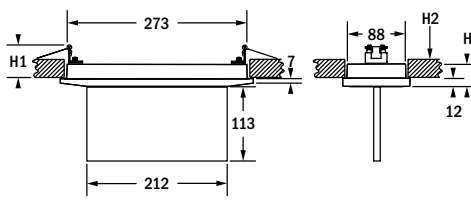


recessed ceiling mounting (hollow ceiling)

ceiling cutout: 278 x 92mm

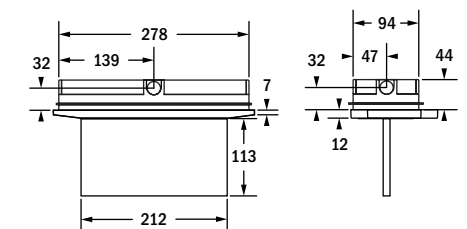

recessed ceiling mounting (solid ceiling)

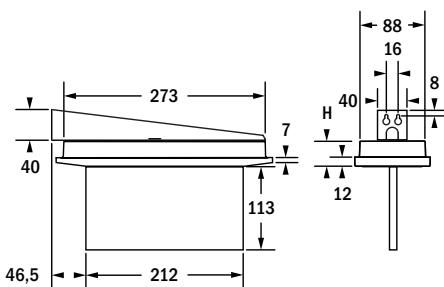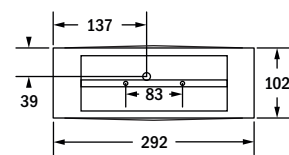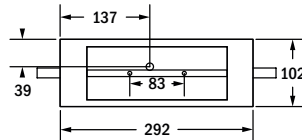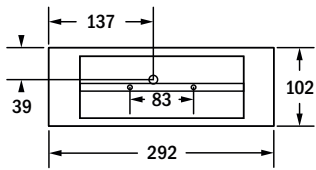

bracket suspension

	H
sc	34.0
gs	55.5