




Downlight LED

Recessed LED luminaire

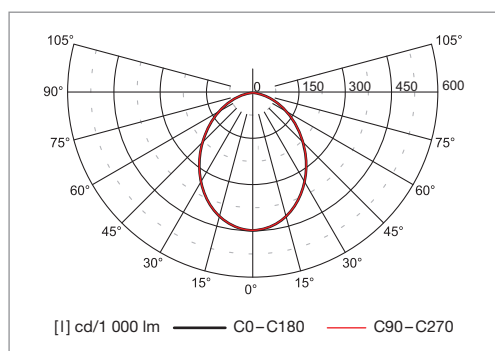

Material:

- body: aluminium with white frame
- difusser: opal polycarbonate

Ambient temperature: -20 ÷ 40 °C

Protection degree: IP20/P44

Power supply: 230 V / 50 Hz

Connection: LED driver, možnost osazení nouzovým zdrojem

LED life: >50 000 hodin

Mounting: recessed into ceiling

Application: stairways, hallways in shopping malls, restaurants, lobbies, shops and hotels



W	• Dimensions (mm)		Recessed hole	Weight Kg
	• Ø	H		
15	160	53	150	0,5
25	215	62	200	0,7
33	215	62	200	0,7

Order code	Description	Lum. flux LED (lm)	Power W	Lum. flux luminaire (lm)	lm/W	Colour temp. K	Ra
A71-10331CED	DWL LED 15W 4K	2 100	16	1 610	101	4 000	>80
A71-10333CED	DWL LED 25W 4K	3 600	25	2 760	110	4 000	>80
A71-10335CED	DWL LED 33W 4K	4 900	33	3 800	115	4 000	>80