

Pratica IP42

emergency



IP42
IK07
850°
□
Batt. LiFe
+40°C
0°C



Luminaire suitable for both emergency lighting and signage, thanks to the pictograms provided. Housing built to withstand outdoor use, equipped with LiFe battery and a 5-year warranty.



Unique luminaire with SE and SA function, with adjustable autonomy from 1 to 3hrs.



Large spaces inside the product facilitate wiring and maintenance. The housing is equipped with 3 x ø16 pre-drilled inlets and can be installed over a 503 box. Recessed box supplied.

Applications

Services, commercial activities, shops, restaurants, offices

Characteristics

Power supply 230VAC ± 10%, 50÷60Hz


Mounting Wall, ceiling, recessed, suspended, electrified track

Recharging time 12h with LiFe battery

Housing Polycarbonate, white RAL 9003




Screen Clear polycarbonate

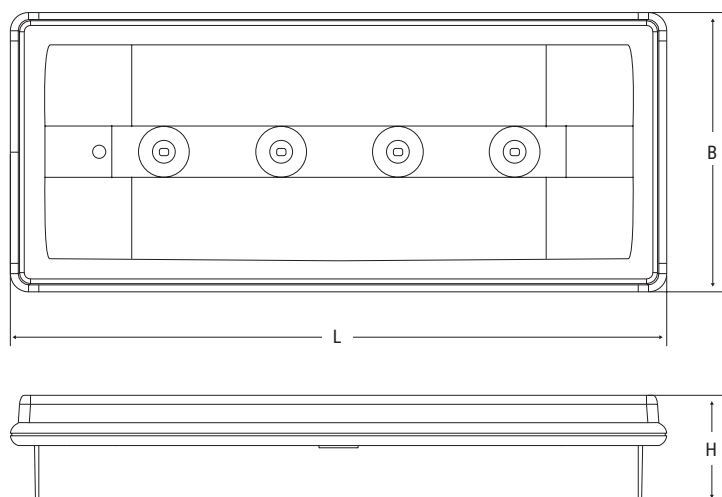Compliance EN 60598-1, EN 60598-2-2, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034




Dimensions mm			Distance of visibility (DV)
L	B	H	
280	119	46	21m

Performance according to EN 1838

Height (m) 	Centre distance (m) ESCAPE ROUTES 		Illuminated surface area (m) LARGE AREAS 	
	Wall	Ceiling	Wall	Ceiling
2.5	5	-	3x3	-
3	-	8	-	6x6
Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40			Lighting >0.5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire Order Code 4400 100 lm			Maintenance coefficient 0.8	

PRATICA IP42


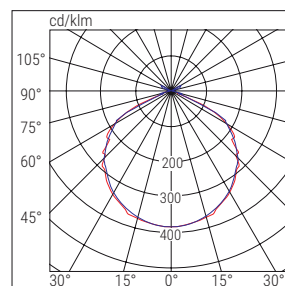


■ CO-C180

■ C90-C270

	Order Code	W eq.	Description	Version	Autonomy h	Battery	FLUX SE lm	FLUX SA lm	Input power		Weight Kg	Packaging Single/Multi pack
									DC	AC		
TR	4400	11	PRATICA 200LM 1/1.5/3h IP42 SATR	SA/SE	1/1.5/3	LiFe 3.2V 0.5Ah	200/160/100	100	1.4 W	0.25	1/12	STANDARD
	4401	18	PRATICA 300LM 1.5/3h IP42 SATR	SA/SE	1.5/3	LiFe 3.2V 1.5Ah	300/160	200	2.5 W	0.3	1/12	
	4402	24	PRATICA 500LM 1.5/3h IP42 SATR	SA/SE	1.5/3	LiFe 3.2V 3Ah	500/250	200	2.5 W	0.35	1/12	
AT	4403	11	PRATICA 200LM 1/1.5/3h IP42 SAAT	SA/SE	1/1.5/3	LiFe 3.2V 0.5Ah	200/160/100	100	1.4 W	0.25	1/12	AUTOTEST
	4404	18	PRATICA 300LM 1.5/3h IP42 SAAT	SA/SE	1.5/3	LiFe 3.2V 1.5Ah	300/160	200	4.8 W	0.3	1/12	
	4405	24	PRATICA 500LM 1.5/3h IP42 SAAT	SA/SE	1.5/3	LiFe 3.2V 3Ah	500/250	200	4.8 W	0.35	1/12	

ACCESSORIES - included

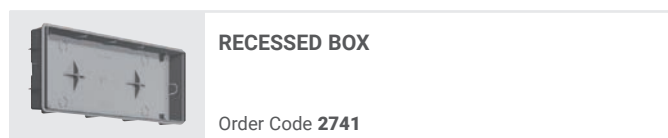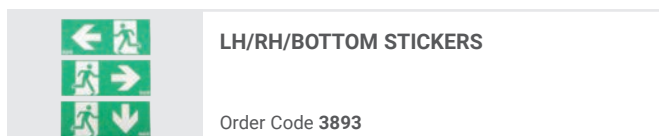

ACCESSORIES - to be ordered separately

