Leader | BS101

Industrial luminaires T8 (white reflector)

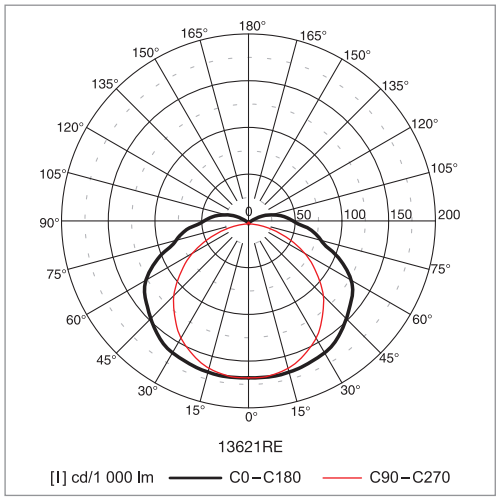

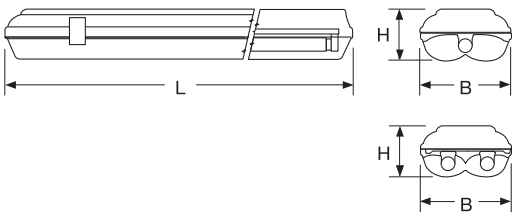

Material:
- body: injection molded, self-extinguishing UV-stabilized polycarbonate
- color: gray RAL 7035
- reflector: white
- diffuser: clear polycarbonate

Degree of protection: IP65
Rated voltage: 230 V/50 Hz
Control gear: low loss ballast or electronic ballast with the highest energy savings. Dimmable ballasts, fast connectors Wieland, MPM and emergency versions on request (only for version Salvaspazio)
Mounting: on ceilings, suspension on chain pendants
Application: washrooms, factory halls, farms, cellars, store houses

The luminaires can be used in covered outdoor areas.

salvaspazio

Code	Power	Lamp	Cap	L×B×H (mm)	Kg
13616	1×18W	T8	G13	674×121×82	1.8
13617	2×18W	T8	G13	674×121×82	1.9
13618	1×36W	T8	G13	1264×121×82	2.5
13619	2×36W	T8	G13	1264×121×82	3.1
13620	1×58W	T8	G13	1564×121×82	3.4
13621	2×58W	T8	G13	1564×121×82	4.5
13616RE	1×18W	T8	G13	674×121×82	1.5
13617RE	2×18W	T8	G13	674×121×82	1.6
13618RE	1×36W	T8	G13	1264×121×82	2.2
13619RE	2×36W	T8	G13	1264×121×82	2.8
13620RE	1×58W	T8	G13	1564×121×82	3.1
13621RE	2×58W	T8	G13	1564×121×82	3.8

Note: The Salvaspazio version is supplied in a package minimum 3 pieces or multiple (with the exception of emergency versions).
The fixtures are not equipped with the lamps.
Version with inverter – TR (example: code 13621 becomes 13621TR)

salvatempo

Code	Power	Lamp	Cap	L×B×H (mm)	Kg
14618	1×36W	T8	G13	1264×121×82	2.0
14619	2×36W	T8	G13	1264×121×82	2.3
14620	1×58W	T8	G13	1564×121×82	3.7
14621	2×58W	T8	G13	1564×121×82	4.9
14618RE	1×36W	T8	G13	1264×121×82	1.7
14619RE	2×36W	T8	G13	1264×121×82	2.0
14620RE	1×58W	T8	G13	1564×121×82	3.4
14621RE	2×58W	T8	G13	1564×121×82	4.2

Note: The Salvatempo version comprises pre-installed fluorescent lamps, pre-wired Quick connector and plastic clips already mounted.