

UP•LED Exit AT Opticom


LED Signs

A line of new products for safety signage characterised by superb functionality and versatility, boasting very small dimensions and a clean, elegant design, with innovative retractable universal attachment system. The common denominator which unites the range is the functional simplicity that these devices offer, both in terms of installation and reliability. The design features a quick-connection interlocking bracket which can be installed to the side, rear or top, to satisfy every safety signage requirement with a single device. The brightness and uniformity of the pictogram are at the top of their class.



GENERAL CHARACTERISTICS

- Power** 2W, 3W
- Power supply** 230Vac ± 10% 50Hz
- Operation** Maintained (SA)
- Standard** EN 60598-1, EN 60598-2-2, EN 60598-2-22, EN 1838, EN 50172, ISO 7010
- Protection grade** IP40
- Autonomy** 1h, 1,5h, 2h, 3h, 8h
- Working temp.** -20°C ÷ +50°C (Titanium Battery)
- Mounting** wall, suspended ceiling, ceiling with stems and cables wall bracket, suspended ceiling, three-phase binary
- Housing** White Polycarbonate, RAL 9003
- Optics** high-efficiency back light system
- Light source** LED

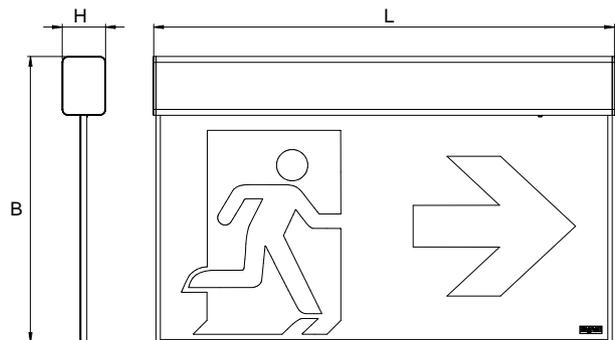

Power W	Visibility distance (DV) m	• Dimensions (mm) •		
		L	B	H
2	20	229	155	30
3	30	329	205	30

Accessories

supplied

Order code	Description
-	DIFFUSERS RIGHT, LEFT, DOWN
-	UNIVERSAL CLAMP



Titanium Battery

- 1 QUICK CHARGING:** the autonomy of the device on which it is installed can reach up to 80% in less than 2 hours
- 2 Withstands extreme operating temperatures:** -20°C ÷ +50°C
- 3 LONG LIFE** with at least 7,000 charge cycles guaranteed, devices can boast 10 years of useful life
- 4 MAXIMUM SAFETY:** unlike normal Lithium batteries, the material used on these accumulators renders them particularly safe, even when a short circuit or perforation occurs

Titanium recharging time (max)

2 W	45 min
3 W	90 min

Accessories

to be ordered separately

Order code	Description
4312	ACCESSORY CEILING RECESS 20m
4313	ACCESSORY CEILING RECESS 30m
4315	ACCESSORY SUSPENSION WITH RODS L250
4316	ACCESSORY SUSPENSION WITH RODS L500
4317	ACCESSORY SUSPENSION WITH RODS L1000
14771	ACCESSORY SUSPENSION WITH CABLES
4319	KIT THREE-PHASE BINARY

System Modules

to be ordered separately

Order code	Description	
15036	LG MODULE	LG
15037	LGFM MODULE	LGFM
15038	DALI OPTICOM MODULE ***	

DALI
MODULE
15038

LG
MODULE
15036

LGFM
MODULE
15037


MODULES AVAILABLE TO EXTEND THE SYSTEM CONTROL TO LG, LGFM, DALI



INTELLIGENT PHOTOSENSOR SUPPLIED



Smartphone interface
Smartphone interface to control and set up the system

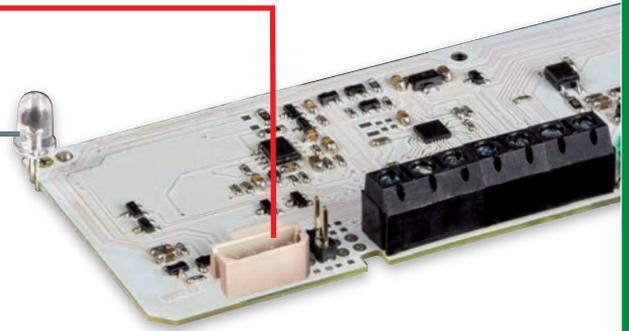

Visibility distance
VD 20 meters



Visibility distance
VD 30 meters

The right visibility for every space

The range of signage devices that adapts to spaces of every size, from the warehouse to the office and from industrial to designer structures.

CEILING MOUNTING



- UNIVERSAL BRACKET

supplied

WALL INSTALLATION



- UNIVERSAL BRACKET

supplied

THREE-PHASE BINARY MOUNTING



4319 THREE-PHASE BINARY KIT

to be ordered separately

AT



opticom
TECHNOLOGY

W	Order code	Description	Model	Autonomy	Battery	DV m	N° LED	Absorption max W	Weight kg	Pack
2	4380	UP LED EXIT AT OPT 20M SA 8LTO	SA	1-1,5-2-3-8h	LTO 7.2V 0.5Ah	20	24	7,5	0,3	1/6
3	4381	UP LED EXIT AT OPT 30M SA 8LTO	SA	1-1,5-2-3-8h	2x LTO 7.2V 0.5Ah	30	36	7,5	0,5	1/6

LG

with System Module integration - order code 15036

LGFM

with System Module integration - order code 15037

DALI

*** ith System Module - Order code 15038

UP LED
EXIT