


Zero

emergency

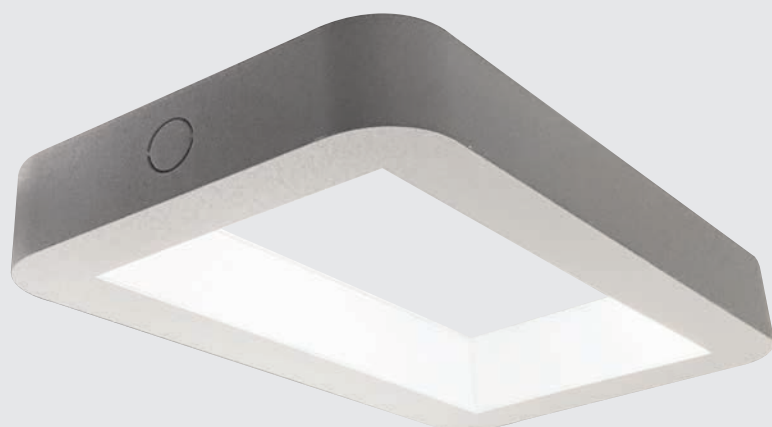

IP40

IK05

850°

+40°C
0°C



+45°C
-10°C



archieco : clean and elegant design lines with surfaces that can be painted together with the wall, made of recyclable materials.



Revolutionary design with unprecedented aesthetic features.



Emergency luminaire but also safety signage, both single-sided and edge mounted, but also multiple installation solutions.



Three optical solutions to meet any requirement:

- Mirror Silver symmetrical
- Mirror Silver asymmetrical
- Mirror Silver diffusing

Applications

Civil, services, offices, shops, design showrooms

Characteristics

Power supply 230VAC \pm 10%, 50÷60Hz


Mounting Wall, ceiling

Recharging time 12h

Housing Polyester powder-coated pre-galvanised sheet steel, white RAL 9003


Optics Aluminium reflector and PMMA diffuser

Compliance EN 60598-1, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

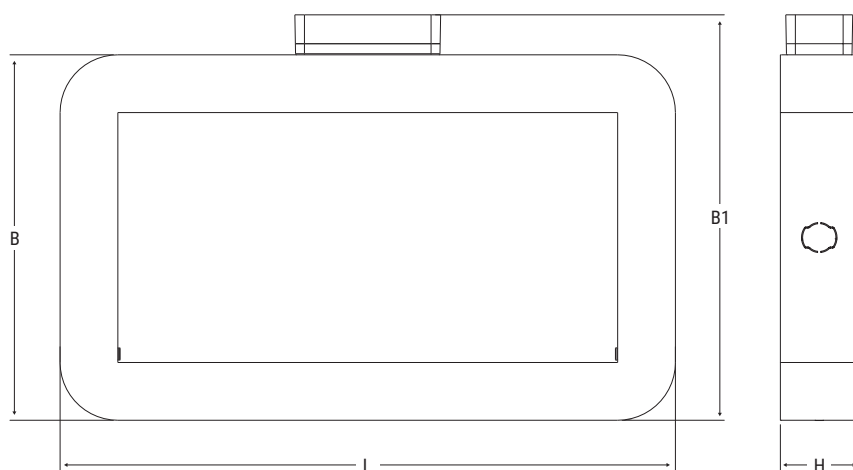


Dimensions mm			
L	B	B1	H
277	164.5	182.5	35


082

	Order Code	W	Description	Version	Autonomy h	FLUX SE lm	FLUX SA lm	Input power		Note
								DC	AC	
TR	18200		ZERO TR RM	SE/SA	1/2/3	200/100/70	100		3W	
AT	18202		ZERO AT SA	SE/SA	1/1.5/2/3/8	300/200/150/100/40	100		5W	
CT	18201		ZERO CT SA	SE/SA	1/1.5/2/3/8	300/200/150/100/40	100		5W	
CT luminaires can integrate optional modules for expansion to other systems: LG module code 15036 - LGFM module code 15037 - DALI module code 15038										

ONE LUMINAIRE, 4 INSTALLATION SOLUTIONS



ACCESSORIES - supplied

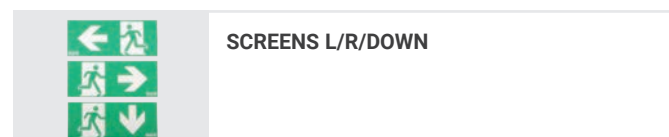

ACCESSORIES - to be ordered separately

