




Exit

emergency



 Signage suitable for any industrial or services installation. Available in three sizes with a distance of visibility (DV) of 20, 30 or 60 m. Version with fast-charging Titanium Battery (LTO), with 10 years of service life and for extreme working temperatures.

 Screen-printed screen for more uniform signal illumination

 Innovative concealed fixing system. The same bracket, supplied, is used for both ceiling and edge mounting.

Applications

Services, industry

Characteristics

Power supply 230VAC \pm 10%, 50÷60Hz


Mounting Wall, false ceiling, ceiling with rods and cables, edge mounting on wall, edge mounting on ceiling, three-phase track

Recharging time 12hrs with LTO battery

Housing Polycarbonate, white RAL 9003


Screen Clear polycarbonate

Compliance EN 60598-1, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

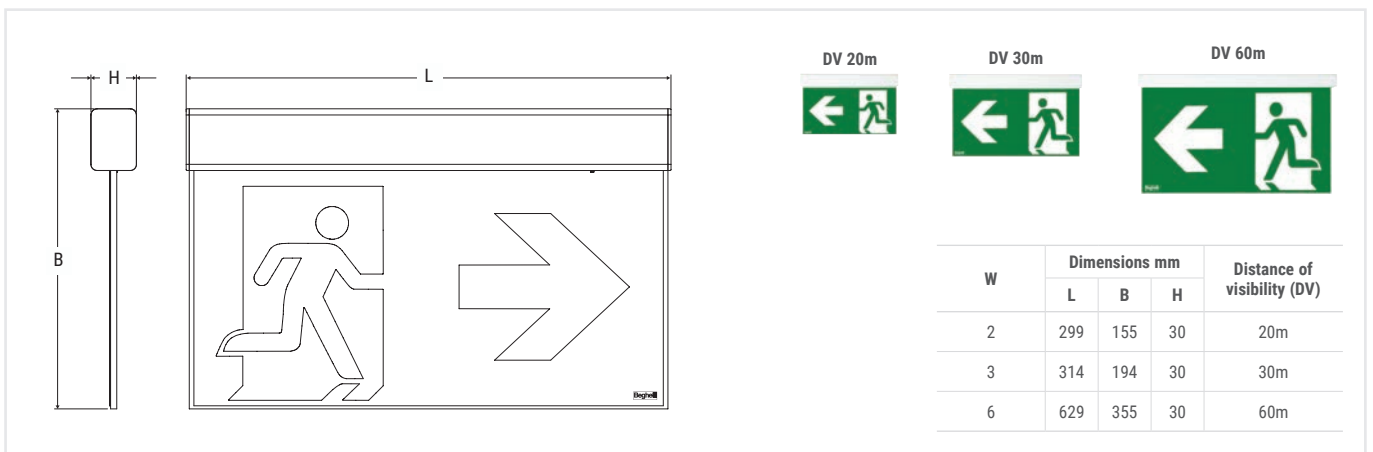


| | Order Code | W | Description | Version | Autonomy h | Battery | Distance of visibility DV | Input power | | Weight Kg | Packaging Single/ Multi pack | |
|----------|-------------|--|-------------------------|---------|-------------|-------------------|---------------------------|-------------|------|-----------|------------------------------|--------------------------|
| | | | | | | | | DC | AC | | | |
| TR | 4320 | | EXIT DF20M SA RM | SA/SE | 1/2/3 | NiMh 3.6V 750mAh | 20m | | 2.5W | 0.3 | 1/6 | STANDARD |
| | 4321 | | EXIT DF30M SA RM | SA/SE | 1/2/3 | NiMh 3.6V 1.5Ah | 30m | | 3.5W | 0.5 | 1/6 | |
| | 4322 | | EXIT DF60M SA RM | SA/SE | 1/2/3 | 2xNiMH 3.6V 1.2Ah | 60m | | 6.5W | 1 | 1/3 | |
| AT - OPT | 4380 | | EXIT AT OPT 20M SA 8LTO | SA/SE | 1/1.5/2/3/8 | LTO 7.2V 0.5AH | 20m | | 7.5W | 0.3 | 1/6 | CENTRALISED SELF-TESTING |
| | 4381 | | EXIT AT OPT 30M SA 8LTO | SA/SE | 1/1.5/2/3/8 | 2x LTO 7.2V 0.5AH | 30m | | 7.5W | 0.5 | 1/6 | |
| | LG | Standalone luminaires with Centralised Diagnostics integrating the Module Order No. 15036 | | | | | | | | | | |
| | LGFM | Standalone luminaires with Centralised Radio Diagnostics integrating the Module Order Code 15037 | | | | | | | | | | |
| | DALI | Standalone luminaires with Dali Centralised Diagnostics integrating the Module Order Code 15038 | | | | | | | | | | |

ACCESSORIES - included




LH/RH/BOTTOM SCREENS
Screen printing on opal polycarbonate




UNIVERSAL BRACKET


ACCESSORIES - to be ordered separately




CEILING RECESSED MOUNTING ACCESSORY
Distance of visibility (DV) 20-30 m
Order Code **4312** (20 m) - **4313** (30 m)




SUSPENDED MOUNTING ACCESSORY WITH CABLES
Order Code **14771**




THREE-PHASE TRACK KIT
Order Code **4319**




EDGE MOUNTING WALL BRACKET
60m versions only
Order Code **19045**



SUSPENDED MOUNTING RODS
250 - 500 - 1000 mm
Order Code **4315** (250 mm) - **4316** (500 mm)
4317 (1000 mm)



LG - LGFM - DALI MODULE (AT-OPT version only)
LG - Order Code **15036**
LGFM - Order Code **15037**
DALI - Order Code **15038**



RM INIBIT REMOTE CONTROL
RM for TR versions only
Order Code **2730**

RM