



# Atomic LED Direct/Indirect

## Ceiling and suspended LED luminaires – direct / indirect

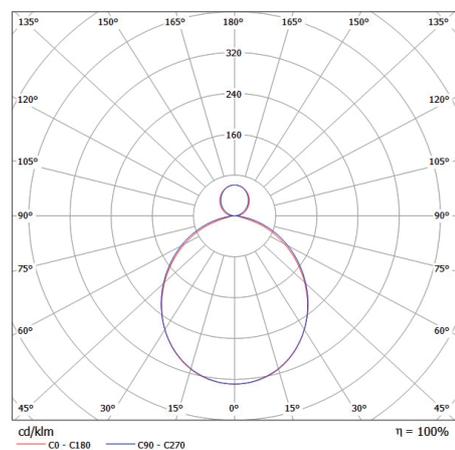

A11-10R92CM

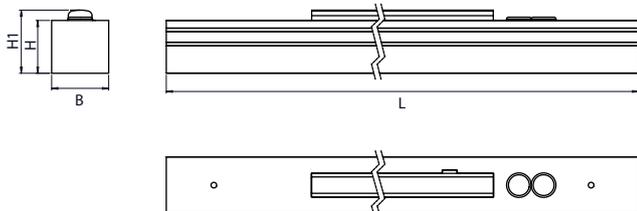

Drawing applies to partially recessed indirect fitting

Dimension "H1" = 67 mm (applies to partially recessed indirect fitting)  
Length is including endings

This table refers to direct lighting only:

MTBF of power supply\*\* 65 000 h  
(MTBF: Mean Time Between Failures)  
Luminous flux decrease:\*\* > 60 000 h (L80B20)  
Color temp. stability: 3 SDCM  
\*\* Applies to ambient temperature 25°C

Power* W direct / indirect	Code	Absorption W direct / indirect	Lum. flux (lm) direct / indirect	lm/W direct / indirect	Color temp. K	Ra	EEC	L × B × H (mm)	Kg	Indirect fitting
2×36 / 10	A11-10R61CM	40 / 11.5	3 483 / 800	87 / 70	4 000	>80	A+	1 207 × 60 × 56	2.9	fully recessed
2×58 / 15	A11-10R92CM	59 / 16.5	5 235 / 1 100	89 / 67	4 000	>80	A+	1 207 × 60 × 56	2.9	partially recessed

Dimmable versions with DALI ballast on request.

\* Indicative power just for fluorescent fixtures comparison purpose