


Leader | 21-01, 21-04

Industrial luminaires T8, T5 (white varnished steel sheet reflector 21-01, highly polished aluminium reflector 21-04)

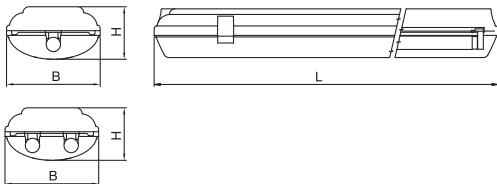

Interconnecting cables:

Set for the luminaire	3 × 1.5 mm ²	3 × 2.5 mm ²	5 × 1.5 mm ²	5 × 2.5 mm ²
18W	99-180	99-181	99-182	99-183
36W	99-184	99-185	99-186	99-187
58W	99-188	99-189	99-190	99-191

Code	Reflector	Power	Lamp	Cap	L × B × H (mm)	Kg
21-043/218/□Y	polished AL	2 × 18W	T8	G13	670 × 170 × 95	2.7
21-043/236/□Y	polished AL	2 × 36W	T8	G13	1280 × 170 × 95	3.7
21-043/258/□Y	polished AL	2 × 58W	T8	G13	1580 × 170 × 95	4.2
21-043/158/□YH	concentrating	1 × 58W	T8	G13	1580 × 170 × 95	3.9
21-043/180/CYH	concentrating	1 × 80W	T5	G5	1580 × 170 × 95	3.9

Code	Power	Lamp	Cap	L × B × H (mm)	Kg
21-013/118/□Y	1 × 18W	T8	G13	670 × 170 × 95	2.0
21-013/136/□Y	1 × 36W	T8	G13	1280 × 170 × 95	3.0
21-013/158/□Y	1 × 58W	T8	G13	1580 × 170 × 95	3.4
21-013/218/□Y	2 × 18W	T8	G13	670 × 170 × 95	2.3
21-013/236/□Y	2 × 36W	T8	G13	1280 × 170 × 95	3.3
21-013/258/□Y	2 × 58W	T8	G13	1580 × 170 × 95	3.8
21-043/180/CY	1 × 80W	T5	G5	1580 × 170 × 95	3.9

The fixtures are not equipped with the lamps.

- 99-541 – a guard for 18/2 × 18W luminaires (1pc)
- 99-542 – a guard for 36/2 × 36W luminaires (1pc)
- 99-543 – a guard for 58/2 × 58W luminaires (1pc)
- 99-544 – stainless steel fasteners for 18/2 × 18W luminaires (4pcs)
- 99-545 – stainless steel fasteners for 36/2 × 36W luminaires (8pcs)
- 99-546 – stainless steel fasteners for 58/2 × 58W luminaires (10pcs)
- 99-547 – wall cantilevers (1pc) – for one luminaire 2pcs needed

- – E (low loss ballast, parallel compensation)
- C (electronic ballast)

Material:

- body: injection molded, self-extinguishing UV-stabilized polycarbonate
- color: gray RAL 7035
- reflector: white varnished steel sheet or pure aluminium sheet
- diffuser: clear polycarbonate (for version 18W micro-structured)

Degree of protection: IP65

Rated voltage: 230 V / 50 Hz

Control gear: low loss ballast or electronic ballast with the highest energy savings. Dimmable ballasts, fast connectors Wieland, MPM and emergency versions are on request

Mounting: separate or in-line mounting on ceilings or walls, suspension on chain pendants
The luminaires are supplied with ceiling holders (2pcs), lifting eyes (2pcs) and a lead-in insulator (1pc).

Accessories: (must be ordered separately)

a set of interconnecting cables

Application: cellars, factory halls, storehouses, farms

The luminaires can be used in covered outdoor areas.



Version with concentrating reflector