

# Dot

emergency

nuBe



IP65

IK07

850°

Batt. LiFe  
+40°C  
0°C

Batt. LTO  
+45°C  
-20°C



**archieco** : clean and elegant design lines with surfaces that can be painted together with the wall, made of recyclable and partly compostable materials.



Small dimensions with a luminous flux of up to 1000lm. Possibility to integrate laser signage with an Orma IP65 module.



By rotating the lens, the luminaire is suitable for both large areas (225m<sup>2</sup>) and escape routes up to 23m.



Double optical scheme made up of two pairs of lenses rotating on the axis and alternatively matching two high-efficiency LEDs.

## Applications

Services, offices, cinemas, hotels, museums, schools, shops, shopping centres, design rooms

## Characteristics

**Power supply** 230VAC ± 10%, 50÷60Hz



**Mounting** Recessed

**Recharging time** 12h

**Housing** PHA white RAL 9003

**Optics** PMMA

**Compliance** EN 60598-1, EN 60598-2-2, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

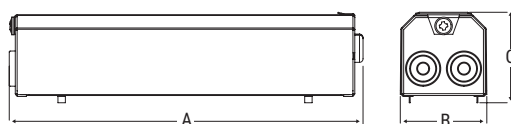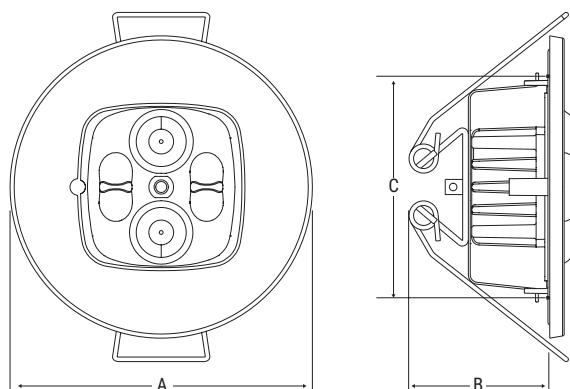

	Dimensions mm		
	A	B	C
Luminaire	Ø 80	38	Ø 59
Inverter versions <b>TR-AT</b>	191	47	49
Inverter version <b>LG</b>	254	47	52

080

## Performance according to EN 1838

Lens	Height (m)	Centre distance (m) ESCAPE ROUTES		Illuminated surface area (m) LARGE AREAS	
		Wall	Ceiling	Wall	Ceiling
Lungaluce	3	-	30	-	-
Largaluce	3	-	-	-	14x16

Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40


Lighting >0.5lx at floor level without reflections Emax/Emin <40

Performance with reference to luminaire Order Code 19712 1000lm

Maintenance coefficient 0.8

## LUNGALUCE

80%




■ C90-C270

■ C0-C180


## ORMA LASER MODULE

Laser micro-projector that emits a bright and prominent arrow-shaped asymmetrical conical beam, producing a virtual pictogram to indicate the nearest escape route. To position the image on the ground at the most suitable point and with the correct signal orientation, simply rotate the body of the device.

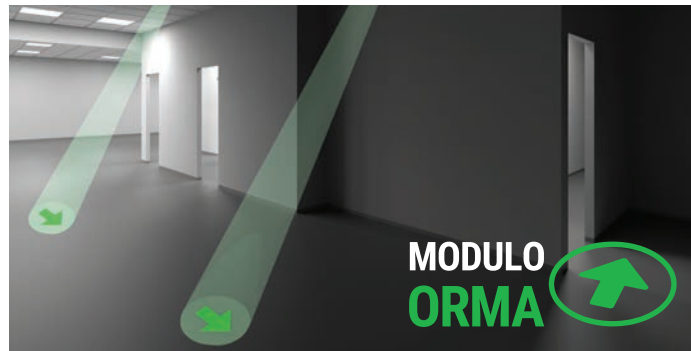

## LARGALUCE

91%




■ C0-C180

■ C90-C270


	Order Code	W	Description	Version	Autonomy h	Battery	FLUX SE lm	FLUX SA lm	Input power		Weight Kg	Packaging Single/ Multi pack	
									DC	AC			
TR	19700		DOT SE/SA 1/2/3H IP65 RM	SA/SE	1/2/3	LiFe 3.2V 1.5Ah	550/300/200	240		3W	0.4	1/6	STANDARD
AT - OPT	19711		DOT AT OPT SE/SA 8LTO IP65	SA/SE	1/1.5/2/3/8	2xLTO 7.2V 0.5AH	550/380/300/200/100	240		5W	0.5	1/6	CENTRALISED SELF-TESTING
	LG		Standalone luminaires with Centralised Diagnostics integrating the Module Order No. 15036										
	LGFM		Standalone luminaires with Centralised Radio Diagnostics integrating the Module Order Code 15037										
	DALI		Standalone luminaires with Dali Centralised Diagnostics integrating the Module Order Code 15038										
LG	19712		DOT GL AT LG SE LIFE IP65	SE	1/2/3	LiFe 12.8V 1.5Ah	1000/550/400	240		4.3W	0.4	1/6	CENTRALISED
	LGFM		Standalone luminaires with Centralised Radio Diagnostics integrating the Module Order Code 19375										

## ACCESSORIES - to be ordered separately




**ORMA LASER MODULE**  
Only for Order 19700 and 19711

Order Code **19883**



**LG - LGFM - DALI MODULE** (AT-OPT version only)  
**LGFM** - Order Code **15037 - 19375**  
**LG** - Order Code **15036**  
**DALI** - Order Code **15038**


LG LGFM DALI



**LG INIBIT REMOTE CONTROL**  
RM for LG versions only

Order Code **12101**

LG



**RM INIBIT REMOTE CONTROL**  
RM for TR versions only

Order Code **2730**

RM