

Dispos Evo

Exit sign luminaire: Square design casing made of sheet steel or stainless sheet steel in universal versions. Single or double-sided escape route signage is provided thanks to exchangeable display inserts.


Versions for surface wall mounting or surface ceiling mounting, or with accessories for recessed wall mounting, wire or rod suspension, or mounting on brackets.



Mounting types



Mounting types with accessories



Technical data

Mounting options:

surface wall mounting, surface or recessed ceiling mounting, wire and rod suspension, bracket suspension

Body:

sheet steel, withe (RAL 9003)
stainless steel (V2A)

Cover:

sheet steel, withe (RAL 9003) (recessed ceiling mounting)
stainless steel (V2A)

Decentralized supply

Protection class: III

Mains supply:
24 V +/- 20% DC

Battery supply:
24 V +/- 20% DC

Ambient temperature:
-20 to +40 °C

Central supply

Protection class: I

Mains supply:
198V-254V/50Hz

Battery supply:
EVG: 110V - 276V
Sleb/Alog: 176V - 276V

Ambient temperature:
-20 to +40 °C

Decentralized supply / Central supply



Surface wall mounting (single faced indication), surface or recessed ceiling mounting, wire and rod suspension, bracket suspension (double faced indication)¹

| | | | | | | | | |
|------------|---------|---------|---------|-----|----|-------|-------|----------------|
| T93280-S24 | T93280E | T93280S | T93280A | 22m | 24 | 1.6 W | 2.2 W | 5.0 VA / 3.0 W |
| T93282-S24 | T93282E | T93282S | T93282A | 30m | 48 | 3.2 W | 4.3 W | 6.0 VA / 3.8 W |

stainless steel

Surface wall mounting (single faced indication), surface or recessed ceiling mounting, wire and rod suspension, bracket suspension (double faced indication)¹

| | | | | | | | | |
|------------|---------|---------|---------|-----|----|-------|-------|----------------|
| T93281-S24 | T93281E | T93281S | T93281A | 22m | 24 | 1.6 W | 2.2 W | 5.0 VA / 3.0 W |
| T93283-S24 | T93283E | T93283S | T93283A | 30m | 48 | 3.2 W | 4.3 W | 6.0 VA / 3.8 W |

¹ For recessed ceiling mounting, wire and rod suspension and bracket suspension, please order accessories separately.

Please order mounting accessories separately







| Order code | Description |
|------------|-------------|
| VD 22m | VD 30m |
| F95947 | F95948 |
| F95954 | F95955 |
| F95946 | F95946 |
| F95953 | F95953 |
| F95949 | F95950 |
| F95956 | F95957 |
| F95945 | F95945 |
| F95952 | F95952 |
| F95959 | F95960 |

Please order exit sign accessories separately

| Order code | Description |
|------------|-------------|
| VD 22m | VD 30m |
| E16260M | E16128M |
| E16261M | E16129M |
| E16262M | E16130M |

Fitting supplied complete with





| VD 22m | VD 30m | Description |
|--------|--------|--|
| F95951 | F95951 | Adaptor for wall mounting, white |
| F95958 | F95958 | Adaptor for wall mounting, stainless steel |



surface wall mounting





surface ceiling mounting

ceiling cutout:
20m: 287mm x 70mm
30m: 360mm x 70mm

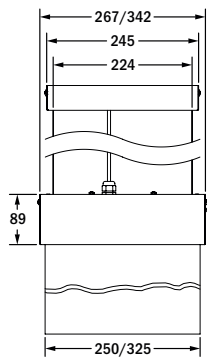

recessed ceiling mounting

wire suspension

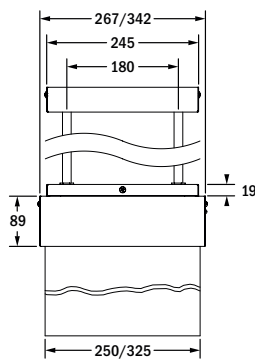

bracket suspension

rod suspension