



Pratica 250 LED

Emergency LED luminaire


Luminaire is equipped with innovative optics, which increases the lighting power, which allows to increase the distance between luminaires and readability of the pictograms.
 Design of the optics offers special anti-glare function and excellent light dispersion thanks to the metacrylate diffuser, which contains the LED source and maximalises the luminous flux.
 LiFePO4 battery is adapted for harsh working temperatures




GENERAL CHARACTERISTICS

- Equivalent power*** 24 W
- Power supply** 230Vac ± 10% 50Hz
- Version** Maintained (SA), Non-maintained (SE), Rest Mode
- Standard** EN 60598-1, EN 60598-2-2, EN 60598-2-22, EN 1838, UNI 11222
- Protection grade** IP65, IK08
- Autonomy** 1,5h, 3h
- Charging time** 12 h
- Working temp.** -10°C ÷ +60°C
- Control gear** Electronic driver
- Mounting** Recessed, wall, ceiling, electrified rail
- Body** White polycarbonate RAL 9003
- Optics** Anti-glare
- Difusser** Transparent polycarbonate
- Light source** LED 5000K

* Equivalent power for comparison with fluorescent lamp

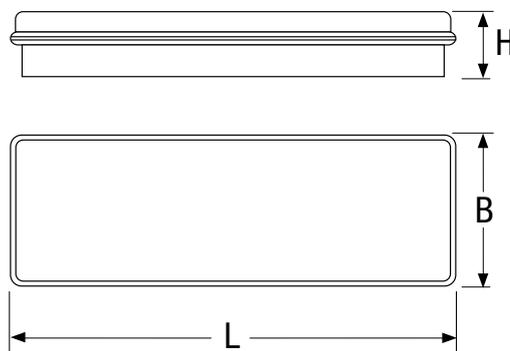

| W* | • Dimensions(mm) • | | | Visibility |
|----|--------------------|-----|----|------------|
| | L | B | H | |
| 24 | 300 | 138 | 55 | 24m |

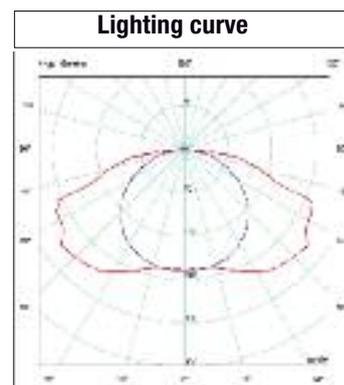

Accessories

supplied

| Code | Description |
|------|--------------------------------------|
| 3727 | CABLE GLANDS PG16/PG20 |
| 2742 | BUILT-IN BOX IP65 |
| 4117 | STICKER PICTOGRAMS EXIT (version SA) |

Accessories

to be ordered separately

| Code | Description |
|------|----------------------------|
| 3723 | RECESSED HOOKS |
| 2751 | CEILING CONSOLE |
| 3907 | PROTECTIVE GRILLE |
| 4124 | DIFUSSOR SX-DX |
| 4125 | DIFUSSOR FOR HIGH MOUNTING |
| 4126 | DIFUSSOR FOR LOW MOUNTING |

SAFETY SIGNS WITH VISIBILITY 24M




4117 STICKER PICTOGRAMS EXIT supplied in version SA

SAFETY SIGNS



4124 DIFUSSOR SX-DX to be ordered separately
4125 DIFUSSOR FOR LOW MOUNTING to be ordered separately
4126 DIFUSSOR FOR HIGH MOUNTING to be ordered separately

INSTALLATION WITH TUBE Ø 16 Ø 20 MM

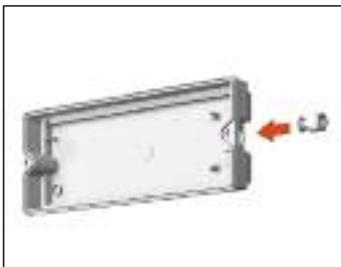

3727 CABLE GLAND PG16/PG20 included

RECESSED MOUNTING




2742 BUILT-IN BOX IP65 included

SUSPENDED MOUNTING




3723 SUSPENDED MOUNTING HOOKS to be ordered separately

ELECTRIFIED RAIL MOUNTING

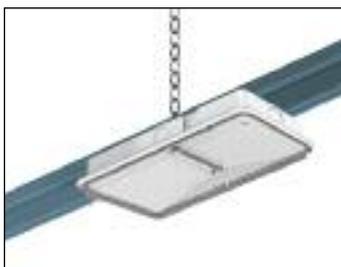

3723 SUSPENDED MOUNTING HOOKS to be ordered separately


PLASTERBOARD CEILING MOUNTING

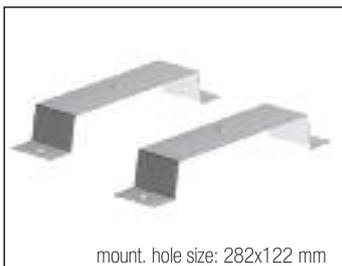

mount. hole size: 282x122 mm

2751 PLASTERBOARD MOUNTING HOLDERS to be ordered separately

PROTECTIVE GRILLE

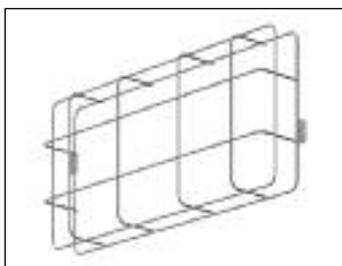

3907 PROTECTIVE GRILLE to be ordered separately

AT

full AutoTest

| W* | Code | Description | Version | Autonomy | Battery | N° LED | Average flux** 1,5h SE lm | Average flux** 3h SE lm | Flux SA lm | Kg | Pcs |
|----|----------------|--------------------------------|---------|----------|-----------------|--------|------------------------------|----------------------------|---------------|------|-----|
| 24 | 250ATSE | PRATICA 250LM 90°/3H IP65 SEAT | SE | 1,5/3h | LiFe 3,2V 1,5Ah | 16 | 250 | 130 | 0,8 | 1/12 | |
| 24 | 250ATSA | PRATICA 250LM 90°/3H IP65 SAAT | SA/SE | 1,5/3h | LiFe 3,2V 1,5Ah | 16 | 250 | 130 | 200 | 1/12 | |

TR

Battery Control System

| W* | Code | Description | Version | Autonomy | Battery | N° LED | Average flux** 1,5h SE lm | Average flux** 3h SE lm | Flux SA lm | Kg | Pcs |
|----|--------------|--------------------------------|---------|----------|-----------------|--------|------------------------------|----------------------------|---------------|------|-----|
| 24 | 250SE | PRATICA 250LM 90°/3H IP65 SETR | SE | 1,5/3h | LiFe 3,2V 1,5Ah | 16 | 250 | 130 | 0,8 | 1/12 | |
| 24 | 250SA | PRATICA 250LM 90°/3H IP65 SATR | SA/SE | 1,5/3h | LiFe 3,2V 1,5Ah | 16 | 250 | 130 | 200 | 1/12 | |

* Equivalent power for comparison with fluorescent lamp ** Minimum guaranteed flux according to EN 60598-2-22