




Aestetica

Emergency luminaire: Casing has a compact design with planar light-emitting surface and a clear insert. Lighting control is provided by a plastic reflector.

Versions for surface wall mounting and surface ceiling mounting or with additional accessories for recessed wall mounting (solid walls) and recessed ceiling mounting (hollow ceilings).



Mounting types



Mounting types with accessories



Technical data

Mounting options:

surface or recessed wall mounting, surface or recessed ceiling mounting

Body: polycarbonate, white (RAL 9003)

Cover: polycarbonate, clear

Reflector: polycarbonate, white

Display pane: methacrylate, printed

Decentralized supply

Protection class: III

Mains supply:
24 V +/- 20% DC

Battery supply:
24 V +/- 20% DC

Ambient temperature:
-10 to +40 °C


Central supply

Protection class: II

Mains supply:
198V-254V/50Hz

Battery supply:
EVG: 110V - 276V
Sleb/Alog: 176V - 276V

Ambient temperature:
-10 to +40 °C



Decentralized / Central supply

SICURO _{S24}	[EVG]	[SLEB]	[ALOG]	LED	P	Φ	P =	S ~	P =
-----------------------	-------	--------	--------	-----	---	---	-----	-----	-----


Surface or recessed wall mounting, surface or recessed ceiling mounting¹

TB93230-S24	TB93230E	TB93230S	TB93230A	20	1.4W	120lm	2.0W	4.5VA	2.5W
-------------	----------	----------	----------	----	------	-------	------	-------	------


¹ For recessed wall / ceiling mounting in cavity walls or hollow ceilings, please order required accessories separately.

Please order mounting accessories separately

Order code	Description
FB3733	Kit for recessed mounting in solid wall or ceilings
FB4266	Kit for recessed mounting in hollow wall or ceilings

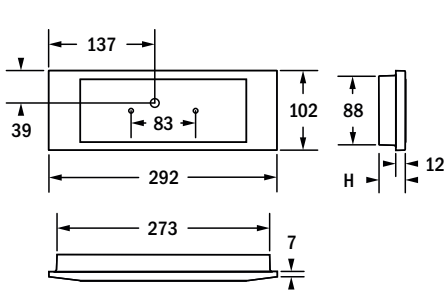


surface wall mounting

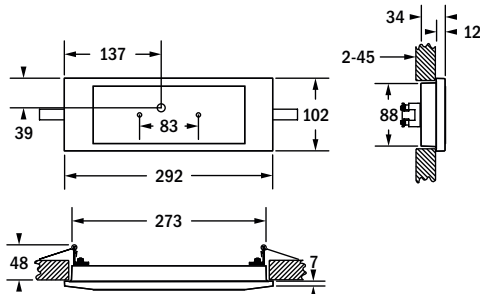


recessed wall mounting (hollow wall)


wall cutout:
278 x 92mm

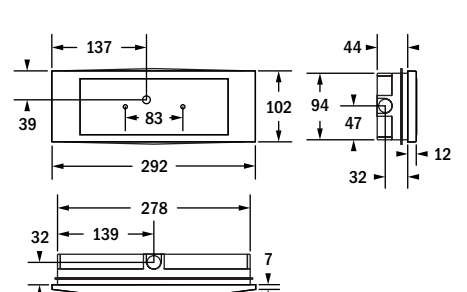

recessed wall mounting (solid wall)

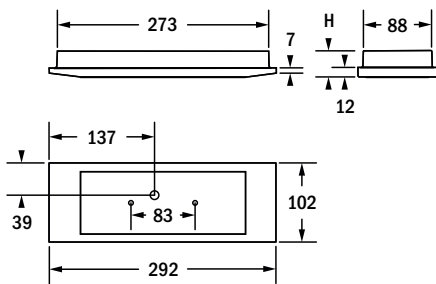


surface ceiling mounting

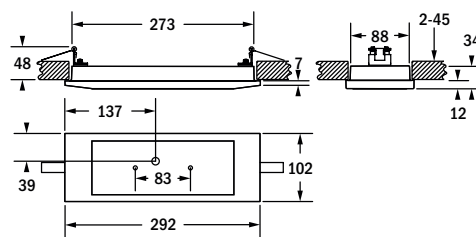

recessed ceiling mounting (hollow ceiling)

ceiling cutout: 278 x 92mm

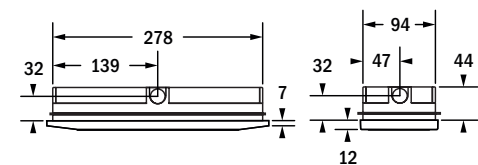

recessed ceiling mounting (solid ceiling)

	H
sc	34.0
cs	55.5