

GeoLED Lite

Waterproof IP65 LED luminaire

GeoLED Lite is ceiling LED luminaire suitable for indoor and outdoor areas, with ceiling or wall installation where more intense lighting is required. It is particularly suited for lighting stairs, building entrance areas, corridors in shopping malls, shops, hotels and restaurants.



GENERAL CHARACTERISTICS

Equivalent Power* 15, 20 W

Power supply 220/240 VAC - 50/60 Hz

Standard EN60598-1, EN60598-2-1

Protection grade IP65

Working temp. -20 °C ÷ +40 °C

Mounting ceiling, wall


Frame colors white, black

Body PC self-extinguishing UV stabilized

Diffuser PC self-extinguishing UV stabilized, opal

Driver Integrated, Electronic

* Equivalent power for comparison with fluorescent tube fixtures

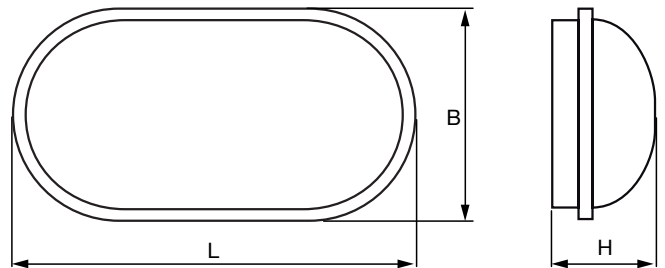

Power W	• Dimensions (mm) •			Weight kg
	L	B	H	
15	214	114	63	0,28
20	269	145	74	0,43



version with white frame



version with black frame

GEO LED Lite

BLACK colour

W	Code	Description	EAN	Power W	N° LED	Colour Temp. K	CRI	Flux of LEDs (lm)	Flux of fixture (lm)	lm/W	Energy Class	Package
15	75424	GEO LED 15W OVAL BLACK 3K	8002219722911	15	45	3000K	>80	2025	1250	83	A++	1/12
20	75426	GEO LED 20W OVAL BLACK 3K	8002219722935	20	52	3000K	>80	2340	1650	83	A++	1/12
15	75425	GEO LED 15W OVAL BLACK 4K	8002219722928	15	45	4000K	>80	2025	1250	83	A++	1/12
20	75427	GEO LED 20W OVAL BLACK 4K	8002219722942	20	52	4000K	>80	2700	1650	83	A++	1/12

GEO LED Lite

WHITE colour

W	Code	Description	EAN	Power W	N° LED	Colour Temp. K	CRI	Flux of LEDs (lm)	Flux of fixture (lm)	lm/W	Energy Class	Package
15	75420	GEO LED 15W OVAL WHITE 3K	8002219722874	15	45	3000K	>80	2025	1250	83	A++	1/12
20	75422	GEO LED 20W OVAL WHITE 3K	8002219722898	20	52	3000K	>80	2340	1650	83	A++	1/12
15	75421	GEO LED 15W OVAL WHITE 4K	8002219722881	15	45	4000K	>80	2025	1250	83	A++	1/12
20	75423	GEO LED 20W OVAL WHITE 4K	8002219722904	20	52	4000K	>80	2340	1650	83	A++	1/12



mounting bracket




PG9 cable gland



wiring

Polar Diagram

15W



Polar Diagram

20W

