

MultiBay LED 50

Multi-function Floodlight

LED powered floodlight with aluminium die cast body and technopolymer screwable top for quick access to the junction box. Screen is made of frosted tempered glass to avoid any glaring.

Versatility is the great innovation in this fixture that can be installed suspended with steel wires, on wall with an adjustable bracket and on ground with a foot base accessory and a single spike.

Its small dimension makes MultiBay ideal for both architectural and industrial types of installation.



GENERAL SPECIFICATION

Power 50 W

Supply 220/240 VAC - 50/60 Hz

Conformity to EN60598-1; EN60598-2-1; EN 62471

Protection degree IP65

Ambient temp. -20°C +40°C

Mounting Wall, ground, suspended

Body Die cast aluminium (RAL 7040)


Reflector White painted die cast aluminium

Power supply Integrated, Electronic

Power supply compartment PC and fiberglass

Screen Frosted tempered glass

Life 35000 h ^φ

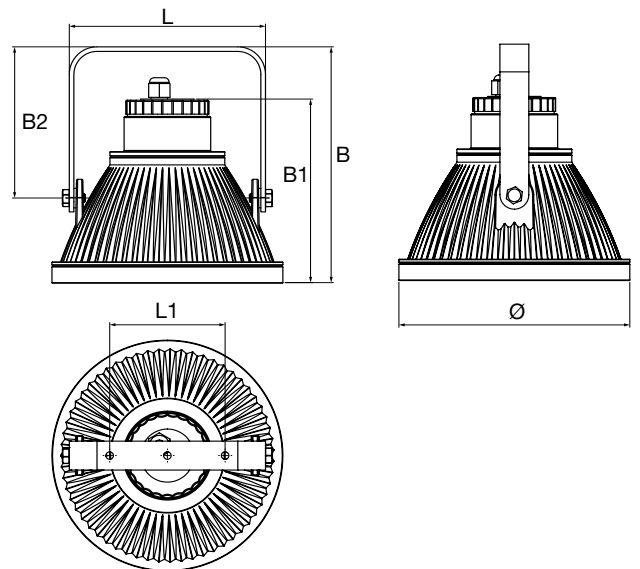

ACCESSORIES - Supplied with


Part #	Description	Packaging
-	MOUNTING BRACKET	1
-	TECHNOPOLYMER FOOT BASE	1
-	SPYKE	1
-	SUSPENSION WIRE	1

Power W	• Dimension (mm) •						N° LED	Weight kg
	Ø	B	B1	B2	L	L1		
50	200	204	159	131	170	100	126	1,8

**Multy bay 50 REPLACES
150W
HALOGEN FLOODLIGHTS**

PART NUMBER 76301

50W

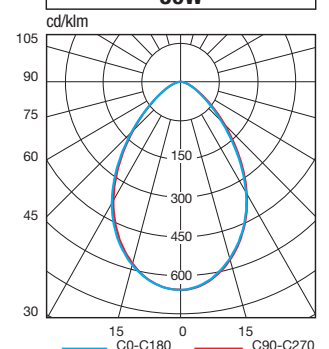

MultyBay LED 50

W	Part #	Description	EAN code	Power W	Colour temp.	Ra	N° LED	Flux (lm)	Lighting efficiency (lm/W)	Energy Class	Packaging single/multi
50	76301	HMF LED 50	8002219713261	47	4000	>80	126	3250	69	A	1/4



Suspension



Wall / Ceiling with adjustable bracket



Ground with spyke



Construction site light

