

# Saving Stagna LED

dustproof ceiling luminaire



IP65

IK05

850°

+40°C  
-20°C



Dustproof ceiling luminaire with high luminous power and a body equipped with polyurethan foam sealing, which prevents aging.



Opal diffuser from highly permeable polycarbonate, preventing glare.



Steel fixing holders for maximally simple installation.

## Application

Industrial, tertiary, warehouses, garages

Luminaires can be used in covered outdoor areas.

## Characteristics

**Power supply** 230 VAC, 50÷60 Hz

**MTBF at 25°C** 50.000h

**Luminous flux maintenance at 25°C**

>60.000h (L80B20)

**Colour stability** 3 SDCM

**Mounting** ceiling, suspended, electrified track


**Body** polycarbonate, RAL 7035 and polyamide fixing hooks

**Optics** steel with reflective white powder coating

**Diffuser** transparent opal polycarbonate


**Colour temperature** 3000K, 4000K, 6000K

**Standards** EN 60598-1, EN 60598-2-1, EN 60598-2-22, EN 62471

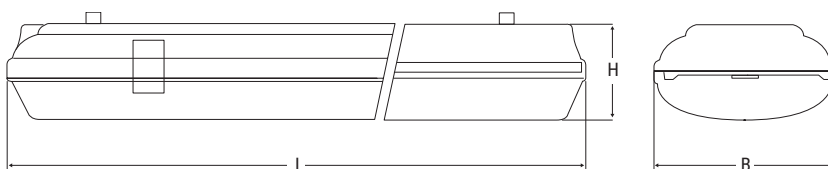


Version	Dimensions mm		
	L	B	H
S	677	121	82
M	1264	121	82
L	1567	121	82

## SAVING STAGNA LED

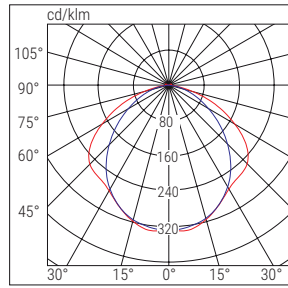


■ C0-C180      ■ C90-C270

## REFLECTOR WITH INTEGRATED, HIGHLY EFFECTIVE LEDS

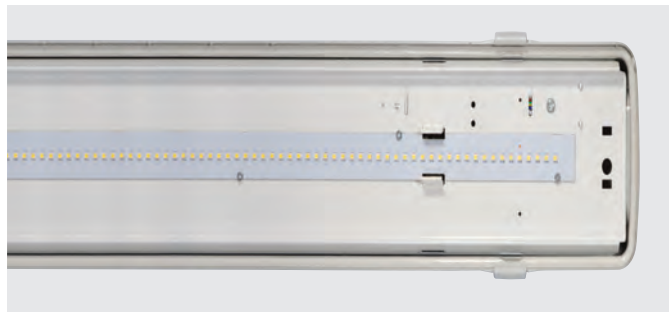

	Version	Order code	Description	Power W	Colour temp. K	CRI	Luminaire flux lm	Brightness efficiency lm/w	Weight Kg	Packaging
ON-OFF	S	72030	SAVING IP65 LED 218 3000K	19	3000	>80	2850	150	1.5	1
	S	72031	SAVING IP65 LED 218 4000K	19	4000	>80	3000	158	1.5	1
	S	72032	SAVING IP65 LED 218 6000K	19	6000	>80	3000	158	1.5	1
	M	72008	SAVING IP65 LED 236 3000K	28	3000	>80	4300	154	2	1
	M	72010	SAVING IP65 LED 236 4000K	28	4000	>80	4500	161	2	1
	M	72012	SAVING IP65 LED 236 6000K	28	6000	>80	4500	161	2	1
	M	72009	SAVING IP65 LED 258 3000K	42	3000	>80	6200	148	2	1
	M	72011	SAVING IP65 LED 258 4000K	42	4000	>80	6500	155	2	1
	M	72013	SAVING IP65 LED 258 6000K	42	6000	>80	6500	155	2	1
	L	72040	SAVING IP65 LED 258 GL 3000K	53	3000	>80	7150	135	3	1
	L	72041	SAVING IP65 LED 258 GL 4000K	53	4000	>80	7500	142	3	1
	L	72042	SAVING IP65 LED 258 GL 6000K	53	6000	>80	7500	142	3	1

## ACCESSORIES - supplied

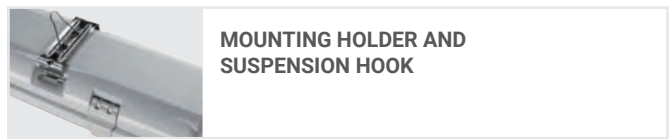

## EMERGENCY WITH LED INVERTER – to be ordered separately

