


# Rock | 84-00, 84-01

Industrial luminaires for T8, T5

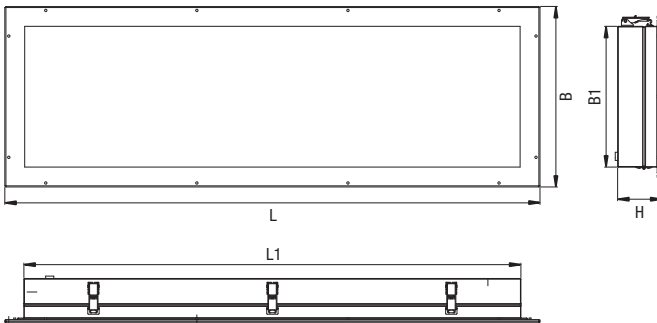

**Material:**

- body: steel sheet finished by powder technology varnishing
- color: white
- diffuser: clear tempered glass

**Degree of protection:** IP54 (84-00)/IP65 (84-01)

**Rated voltage:** 230 V/50 Hz

**Control gear:** low loss ballast or electronic ballast, dimmable ballast on request; the luminaires are offered also in emergency version

**Mounting:** recessed installation

**Fixture metal housing we can open for maintenance from the outside. The fixture flange is attached to the booth ceiling and the fixture is hinged upward or outward for servicing from outside.**

**Application:** designed for paint spray booths, clean rooms and penitentiary applications

IP	Code	Power	Lamp	Cap	L × L1 × B × B1 × H (mm)	Hole cut out (mm)	Kg
54	84-003/336/□T	3×36W	T8	G13	1346 × 1250 × 454 × 354 × 112	410 × 1305	19
54	84-003/354/□T	3×54W	T5	G5	1346 × 1250 × 454 × 354 × 112	410 × 1305	19
54	84-003/436/□T	4×36W	T8	G13	1346 × 1250 × 454 × 354 × 112	410 × 1305	19
54	84-003/454/□T	4×54W	T5	G5	1346 × 1250 × 454 × 354 × 112	410 × 1305	19
65	84-013/336/□T	3×36W	T8	G13	1346 × 1250 × 454 × 354 × 112	410 × 1305	19
65	84-013/354/□T	3×54W	T5	G5	1346 × 1250 × 454 × 354 × 112	410 × 1305	19
65	84-013/436/□T	4×36W	T8	G13	1346 × 1250 × 454 × 354 × 112	410 × 1305	19
65	84-013/454/□T	4×54W	T5	G5	1346 × 1250 × 454 × 354 × 112	410 × 1305	19

The fixtures are not equipped with the lamps.

- – E (low loss ballast)
- C (electronic ballast)