


Arietis M LED - versatile installation

Recessed LED luminaires IP54 – ceiling modules M600 - upper mounting
– surfaced on ceiling

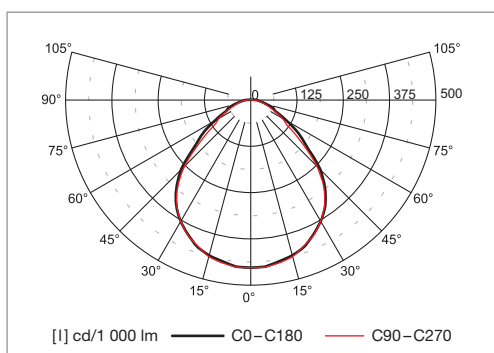

Material:

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003
- diffuser: frosted acrylic

Degree of protection: IP54

Rated voltage: 230 V/50 Hz

Control gear: LED driver, the luminaires are offered also in emergency version

Mounting: versatile mounting into ceiling modules M600 or surfaced mounting on ceiling

Accessories: (to be ordered separately)

19355 – inverter LED AT/LG 6W 55V 123H

Application: operating theaters, hospitals, laboratories, precincts with high humidity and dustiness, precincts demanding high sanitary codes

MOUNTING INTO CEILING MODULE M600 (upper mounting)



MTBF of power supply** 50 000 h
(MTBF: Mean Time Between Failures)

Luminous flux decrease:** > 50 000 h (L80B20)

Color temp. stability: 3 SDCM

** Applies to ambient temperature 25°C

SURFACED MOUNTING ON CEILING



| Power* W | Code | Absorption W | Lum. flux (lm) | lm/W | Color temp. K | Ra | EEC | L × B × H (mm) | Kg |
|----------|---------------|--------------|----------------|------|---------------|-----|-----|----------------|-----|
| 4×14 | 36-A99/414/NM | 41 | 4 200 | 102 | 4 000 | >80 | A+ | 595 × 595 × 57 | 5.5 |

* Indicative power just for fluorescent fixtures comparison purpose