

Nu.da

emergency



archieco : clean and elegant design lines with surfaces that can be painted together with the wall.



Small size compared to high luminous flux.



Monolithic screen made of shaped methacrylate, designed specifically to optimise light diffusion and to accommodate the pictogram, where required, with an excellent level of light uniformity.

Applications

Services and civil, even in design situations where special care is required to reduce the aesthetic impact of emergency lighting.

Characteristics

Power supply 230VAC \pm 10%, 50÷60Hz


Mounting Wall, ceiling

Recharging time 12h

Housing Polycarbonate, white RAL 9003

Optics PMMA

Compliance EN 60598-1, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

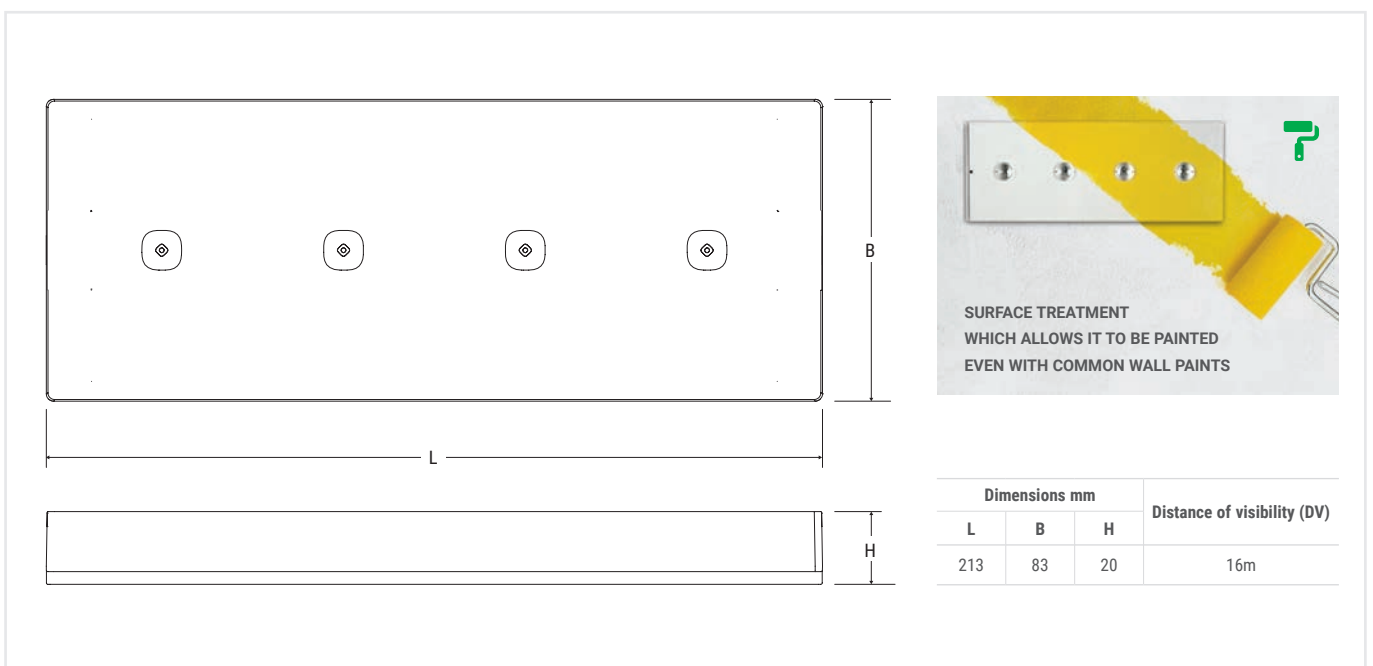


076

Performance according to EN 1838

Height (m)	Centre distance (m) ESCAPE ROUTES		Illuminated surface area (m) LARGE AREAS	
	Wall	Ceiling	Wall	Ceiling
2.5	7	-	5x6	-
3	-	10	-	7x7
Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40			Lighting >0.5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire Order Code 19601 250 lm			Maintenance coefficient 0.8	


NU.DA



■ C0-C180 ■ C90-C270

	Order Code	W eq.	Description	Version	Autonomy h	Battery	FLUX SE lm	FLUX SA lm	Input power		Weight Kg	Packaging Single/Multi pack
									DC	AC		
TR	19600		NU.DA SE 1/2H LiFe	SE	1/2	LiFe 3.2V 0.5Ah	150/100			1W	0.2	1/12
	19601		NU.DA SE 1.5/3H LiFe	SE	1.5/3	LiFe 3.2V 1.5Ah	250/130			1.3W	0.25	1/12
	19602		NU.DA SE/SA 1/2H LiFe	SA/SE	1/2	LiFe 3.2V 0.5Ah	150/100	100		1.6W	0.2	1/12
	19603		NU.DA SE/SA 1.5/3H LiFe	SA/SE	1.5/3	LiFe 3.2V 1.5Ah	250/130	170		2.5W	0.25	1/12
AT-CBL	19620	11-24	NU.DA 1124W AT CBL SE 8LTO	SE	1/1.5/2/3/8	LTO 4.8V 0.5Ah	250/170/130/85/35			1.7W	0.2	1/12
	19621	24-36	NU.DA 2436W AT CBL SE 8LTO	SE	1/1.5/2/3/8	LTO 4.8V 1Ah	450/305/230/155/65			1.7W	0.25	1/12
	19622	11-24	NU.DA 1124W AT CBL SE/SA 8LTO	SA/SE	1/1.5/2/3/8	LTO 4.8V 0.5Ah	250/170/130/85/35	170		3W	0.2	1/12
	19623	24-36	NU.DA 2436W AT CBL SE/SA 8LTO	SA/SE	1/1.5/2/3/8	LTO 4.8V 1Ah	450/305/230/155/65	170		3W	0.25	1/12
	LG	Standalone luminaires with Centralised Diagnostics integrating the Module Order No. 15036										
	LGFM	Standalone luminaires with Centralised Radio Diagnostics integrating the Module Order Code 15037										
	DALI	Standalone luminaires with Dali Centralised Diagnostics integrating the Module Order Code 15038										

ACCESSORIES - to be ordered separately



LG - LGFM - DALI MODULE

LG - Order Code 15036


LGFM - Order Code 15037

DALI - Order Code 15038

LG


LGFM

DALI




LH/RH/BOTTOM/TOP STICKERS

Order Code 4329



THREE-PHASE TRACK KIT

Order Code 4319



PROTECTIVE GRILLE

Dimensions: 305x110x100 mm

Order Code 3903

