

UP•LED Multi

LED Emergency


Elegant and compact emergency lighting fixture. Made to be mounted on plasterboard with a hole having a diameter of 60 mm. Available in two versions: autonomy 1h and 3h. Each version is equipped with 3 interchangeable lenses: long, large, high.



GENERAL CHARACTERISTICS

- Power equivalente*** 24 W
- Power supply** 230Vac ± 10% 50Hz
- Operation** Non Permanent (SE),
Rest Mode: with optional control device
(cod. 2730)
- Standard** EN 60598-1, EN 61347-2-7, EN60598-2-22, EN 61347-2-13, UNI 11222, EN 1838, EN 60598-2-2
- Protection grade** IP42
- Autonomy** 1h, 3h
- Working temp.** 0°C ÷ +40°C
- Mounting** recessed
- Alimentatore** Electronic control gear with constant current
- Housing** Polycarbonate
- Lens** High-transparency Makrolon PC
- Heat sink** Graphite-charged polyamide
- Springs** C72 Stainless steel
- Light source** LED

* Indicative power for comparison with fluorescent tube fixtures

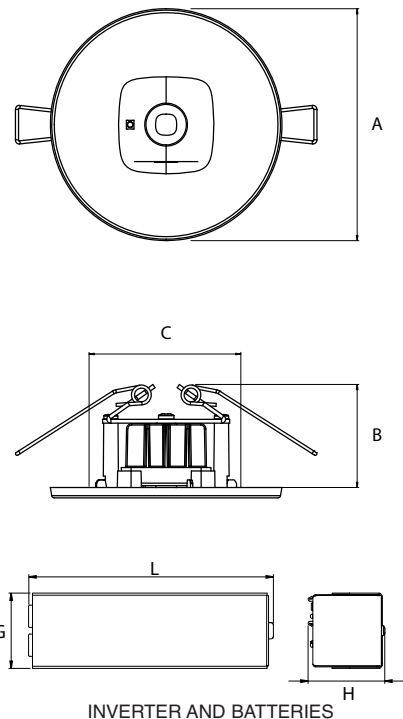

INVERTER AND BATTERIES

Accessories

supplied


Order code	Description
-	LONG LENS WITH COVER
-	WIDE LENS WITH COVER
-	HIGH LENS WITH COVER

Power* W	• Dimensions (mm) •						Lampada
	A	B	C	L	G	H	
24	90	40	60	200	46	43	1 LED

* Equivalent power for comparison with fluorescent tube devices

Technical demonstration of light output on the ground

Lungaluce - long lens - mounting 3 m above the ground

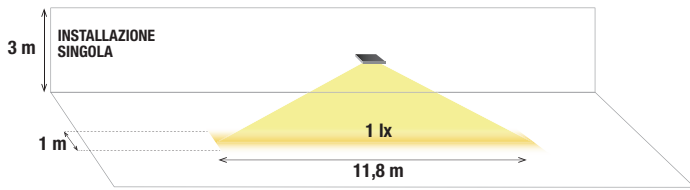


Single mounting


covering an escape route of 11.8 m with 1 lux in the middle and > 0.5 within 1 m

Multiple mounting, fixture centre distance 13 m

covering an escape route of 24.8 m with 1 lux in the middle and > 0.5 within 1 m

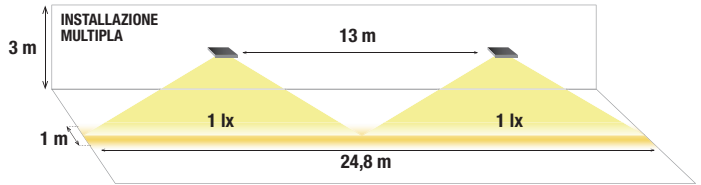

Largaluce - wide lens - mounting 3 m above the ground

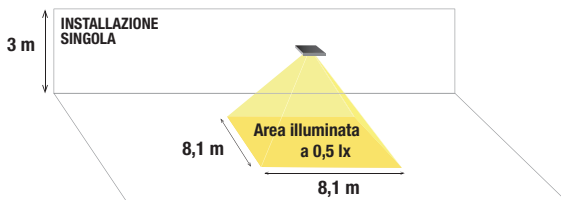


Single mounting


illuminates a surface of 8.1x8.1 m at 0.5 lux

Multiple mounting, fixture centre distance 8.6 m

illuminates a surface of 16.7 x 16.7 m at 0.5 lux

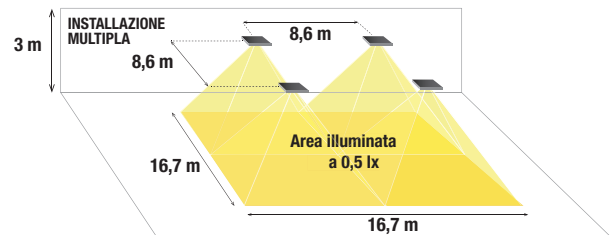

Altaluce - high lens - mounting 7 m above the ground

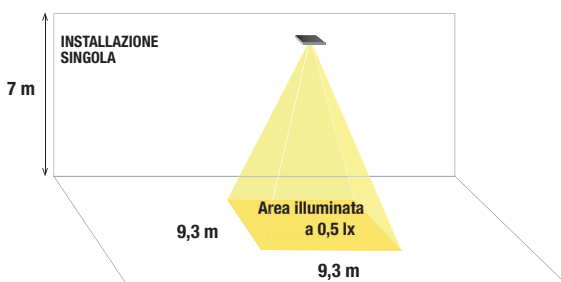


Single mounting

illuminates a surface of 9.3 x 9.3 m at 0.5 lux

Multiple mounting, fixture centre distance 11 m

illuminates a surface of 20.5 x 20.5 m at 0.5 lux

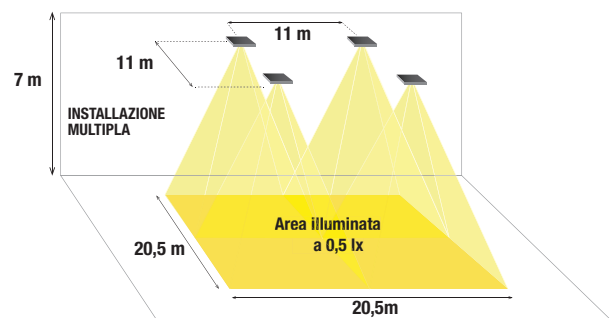

TR

Traditional

W*	Order code	Description	Version	Autonomy	Battery	n° LEDs	Flux* SE lm	Absorption W	Weight kg	Packaging
24	4330	UP LED MULTI 60MM SE 1H	SE	1h	NiCd 3,6V 0,75Ah	1	180	1	0.4	1/6
24	4331	UP LED MULTI 60MM SE 3H	SE	3h	NiCd 3,6V 1,5Ah	1	180	1,5	0.4	1/6