


Luna LED Top

Ceiling and wall LED luminaires IP65

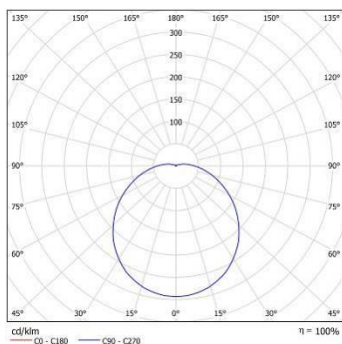

Material:

- body: thermoplastic, high impact resistance
- color: white or gray
- reflector: steel sheet
- diffuser: opal acrylic, UV stabilized

Ambient temperature: -15 ÷ 35°C (0 ÷ 35°C version with inverter)

Degree of protection: IP65

Rated voltage: 230 V/50 Hz


Control gear: LED driver (DALI driver on request), the luminaires are offered also in emergency version (autonomy 3H, AutoTest)

Service life: 50 000 hours


Mounting: on a ceiling or on a wall, incl. flammable surfaces

Application: hospitals, laboratories, entry halls, reception desks, corridors, restaurants, conference rooms

Luminaires are supplied as standard with opal acrylic diffuser IK08. For degree of impact resistance IK10 it is necessary to order polycarbonate diffuser - see version on request.

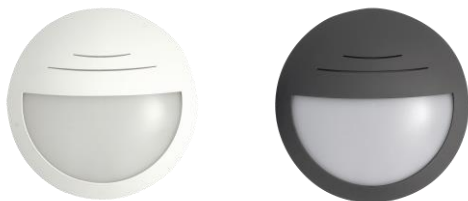

Luminaire in decorative diffuser option.



D, mm	H, mm
295	100

Code	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	Dimensions (mm)	Kg	Corpus
A59-10215	9,3	1 046	112	3 000	>80	Ø295 × 100	1,1	white
A59-10216	13,5	1 460	108	3 000	>80	Ø295 × 100	1,1	white
A59-10217	9,3	1 102	119	4 000	>80	Ø295 × 100	1,1	white
A59-10218	13,5	1 539	114	4 000	>80	Ø295 × 100	1,1	white
A59-10219	9,3	1 046	112	3 000	>80	Ø295 × 100	1,1	gray
A59-10220	13,5	1 460	108	3 000	>80	Ø295 × 100	1,1	gray
A59-10221	9,3	1 102	119	4 000	>80	Ø295 × 100	1,1	gray
A59-10222	13,5	1 539	114	4 000	>80	Ø295 × 100	1,1	gray

Code	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	Dimensions (mm)	Kg	Corpus
A59-10215/L	9,3	615	66	3 000	>80	Ø295 × 100	1,1	white
A59-10216/L	13,5	859	63	3 000	>80	Ø295 × 100	1,1	white
A59-10217/L	9,3	648	70	4 000	>80	Ø295 × 100	1,1	white
A59-10218/L	13,5	906	67	4 000	>80	Ø295 × 100	1,1	white
A59-10219/L	9,3	615	66	3 000	>80	Ø295 × 100	1,1	gray
A59-10220/L	13,5	859	63	3 000	>80	Ø295 × 100	1,1	gray
A59-10221/L	9,3	648	70	4 000	>80	Ø295 × 100	1,1	gray
A59-10222/L	13,5	906	67	4 000	>80	Ø295 × 100	1,1	gray



Version on request:

Order code with suffix /L: Luminaire fitted with decorative diffuser /Louver/

Order code with suffix /MW: Luminaire equipped with microwave motion sensor (with on-off control)

Order code with suffix /PC: Luminaire fitted with polycarbonate cover to increase impact resistance (IK10)

Order code with suffix /DL: Luminaire equipped with dimmable DALI driver

Order code with suffix /TR3: Luminaire is equipped with 3H emergency autonomy module

Order code with suffix /AT: Luminaire is equipped with 3H emergency autonomy module with its own battery - AutoTest