



TULA

Combined exit sign and safety luminaire. Housing has a flat design with convex light-emitting surface and an opal insert. Single or double-sided escape route signage is provided thanks to self-adhesive films. In the combined exit sign luminaire and safety luminaire version, additional high-power LED with lighting control through special lenses for asymmetrically-emitted light distribution (illumination of paths with 1 lx), or for symmetrically emitted light distribution (illumination of surfaces with 0.5 lx).

Versions for wall mounting or with additional equipment for ceiling mounting or wire or rod suspension mounting and mounting on brackets

MOUNTING OPTIONS



MOUNTING OPTIONS WITH EQUIPMENT



TECHNICAL DATA

Housing: Sheet steel, grey (RAL 9006)
Cover: Methacrylate, opal
Lens: Methacrylate

Service life $L_{80B_{20}}$: 50.000 h
Color stability: 3 SDCM



DECENTRAL SUPPLY


Battery supply:
24 V +/- 20% DC
Mains supply:
24 V +/- 20% DC

Ambient temperature:
-20 °C to +40 °C
S24-Protection class:
III

CENTRAL SUPPLY


Battery supply:
176 V-276 V
Mains supply:
198 V-254 V/50 Hz

Ambient temperature:
-20 °C to +40 °C
Protection class:
I

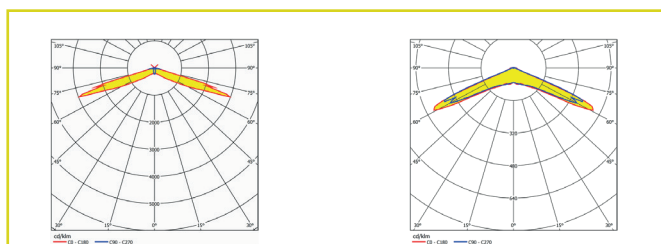


Asymmetric wide beam


Symmetric wide beam up to 3.5 m

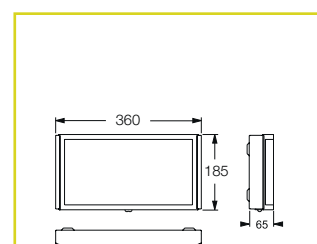


Surface wall mounting

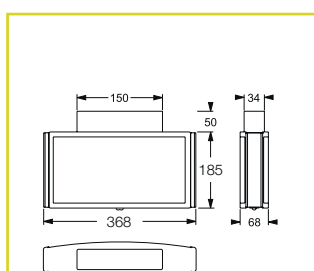


Surface ceiling mounting

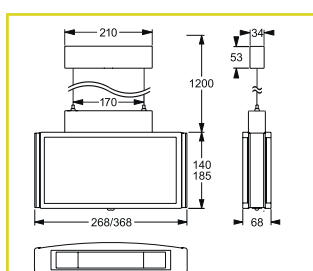

Wire suspension

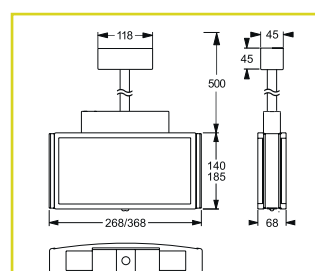

Suspension rod

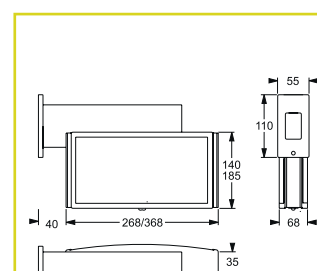

Bracket suspension

SICURO[®] DECENTRAL SUPPLY

Sicuro24 Order code				
-------------------------------	---	---	---	---

Surface wall mounting for single faced indication suitable for escape route lighting and area lighting with 2 changeable lenses

32028	32 m	48 +	Escape route 261 lm	8.1 W
			Area 285 lm	

Surface ceiling mounting for single faced indication suitable for escape route lighting and area lighting with 2 changeable lenses ¹

32030	32 m	48 +	Escape route 261 lm	8.1 W
			Area 285 lm	

¹ Für surface mounting and all suspended versions, please order required equipment separately

SICURO[®] CENTRAL SUPPLY


Sicuro230 Order code					
--------------------------------	--	---	---	---	---

Surface wall mounting for single faced indication suitable for escape route lighting and area lighting with 2 changeable lenses





31028	32 m	48 +	Escape route 261 lm	17.7 VA / 8.8 W
			Area 285 lm	

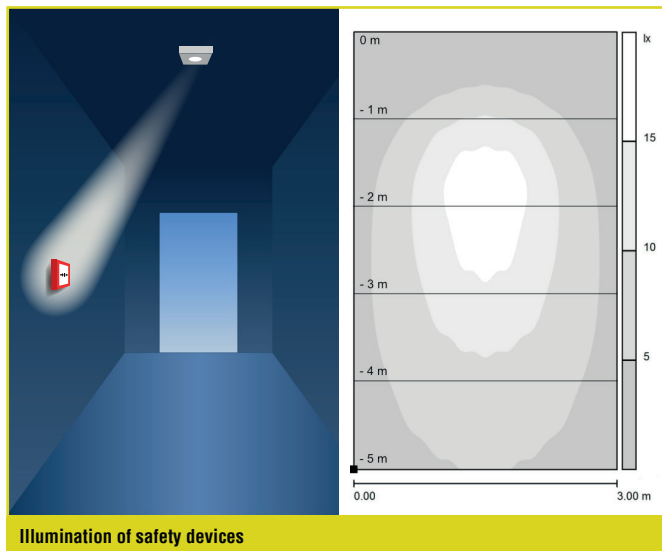Surface ceiling mounting for single faced indication suitable for escape route lighting and area lighting with 2 changeable lenses ¹

31030	32 m	48 +	Escape route 261 lm	17.7 VA / 8.8 W
			Area 285 lm	



Illumination of safety devices

Included in standard delivery	
Order code	Description
F15338MU	Exit sign film 
F15338MR	Exit sign film 
F15338ML	Exit sign film 
F15338MO	Exit sign film 

Please order additional equipment separately	
Order code	Description
F95109PK	Adapter for ceiling mounting
F95109PR	Suspension rod, rectangular, 500 mm
F95109PS	Wire suspension, max. 1.200 mm
F95109P	Bracket suspension