




KUBUS

Housing made of flat sheet steel profiles with angular contours and a clear insert. High-power LED with lighting control through special lenses for asymmetrically-emitted light distribution (illumination of paths with 1 lx), or for symmetrically emitted light distribution (illumination of surfaces with 0.5 lx)

Versions for surface ceiling mounting

MOUNTING OPTIONS



TECHNICAL DATA

Housing: Sheet steel, white (RAL 9003)
Display pane: Methacrylate, clear
Reflector: Aluminium, specular

Service life $L_{50/B_{20}}$: 50.000 h
Color stability: 3 SDCM



SELF-CONTAINED SUPPLY

Mains supply: 198 V–254 V/50 Hz
Specification: Maintained or non-maintained mode

Ambient temperature: LTO: -20 °C to +50 °C
 Classic: 0 °C to +40 °C
Protection class: I

DECENTRAL SUPPLY



Battery supply: 24 V +/- 20% DC
Mains supply: 24 V +/- 20% DC

Ambient temperature: -20 °C to +40 °C
Protection class: III

CENTRAL SUPPLY

Battery supply: 176 V–276 V
Mains supply: 198 V–254 V/50 Hz

Ambient temperature: -20 °C to +40 °C
Protection class: I

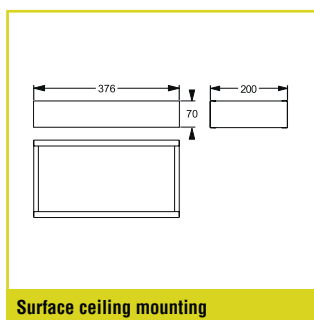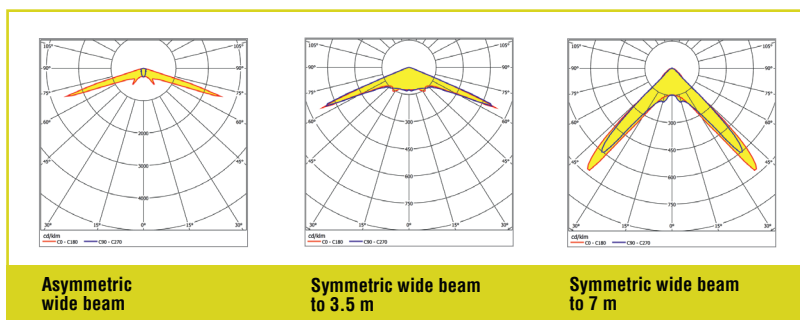



SELF-CONTAINED SUPPLY

Autotest Order code	Logica Order code	Logica FM Order code	LED	Φ 1 h	Φ 3 h	Φ 8 h		S~
Surface ceiling mounting suitable for escape route lighting and area lighting with 2 changeable lenses								
37030	37031	37032	1	Escape route 232 lm	Escape route 134 lm	Escape route 37 lm	2 x LTO 7.2 V / 0.5 Ah	4.85 VA
				Area 234 / 238 lm	Area 135 / 137 lm	Area 38 / 38 lm		

CLASSIC SELF-CONTAINED SUPPLY

Autotest Order code	Logica Order code	Logica FM Order code	LED	Φ 1 h	Φ 3 h		Autotest		Logica	S~
Surface ceiling mounting suitable for escape route lighting and area lighting with 2 changeable lenses										
36030	36031	36032	1	Escape route 232 lm	Escape route 156 lm	NiMH 7.2V / 0.6 Ah		NiMH 7.2V / 1.2 Ah		8 VA
				Area 234 / 238 lm	Area 158 / 160 lm					

DECENTRAL SUPPLY

Sicuro24 Order code	LED	Φ	P=
Surface ceiling mounting suitable for escape route lighting and area lighting with 2 changeable lenses			
32010	1	Escape route 232 lm	3.8 W
		Area 234 / 238 lm	

CENTRAL SUPPLY

Sicuro230 Order code	LED	Φ	S~	P=
Surface ceiling mounting suitable for escape route lighting and area lighting with 2 changeable lenses				
31010	1	Escape route 232 lm	8.3VA / 4.1 W	
		Area 234 / 238 lm		

Please order additional equipment separately

Order code	Description
F95032K	Wire guard