

Strada LED



STRA LED UC 1X70 SD 4K

Beghelli Code: **S70UCSD**

SYSTEM:SD X



Description: Lighting
EAN: 8002219719249

ELECTRICAL AND LIGHTING TECHNICAL CHARACTERISTIC

SUPPLY VOLTAGE TYPE: AC/DC
NOMINAL VOLTAGE AC: 230 V
VOLTAGE SUPPLY RANGE AC: 93 V+265 V
FREQUENCY SUPPLY RANGE: 50 Hz+60 Hz
POWER FACTOR (Cos fi): 0.97
NOMINAL VOLTAGE DC: 216 V
VOLTAGE SUPPLY RANGE DC: 176+250 VOLT
ABSORBED POWER: 48 W
FLUX: 6500 lm
EFFICIENCY: 135 lm/W
Ta: -20 °C+40 °C
INSULATION CLASS: II
CRI: >70
CCT: 4000 K
COLOR CONSISTENCY (SDCM): SDCM3
LED NUMBER: 16
DRIVER TYPE: Constant current LED Smart driver (programmable)
DRIVER LIFE MTBF: 70000 h
DIMMER TYPE: SD X
INRUSH: 28 A,0.15 ms
QUANTITY BREAKER: B16 20
QUANTITY BREAKER: C16 26

MOUNTING AND APPLICATIONS


ENVIRONMENT: Outdoor
APPLICATION: Poles

MECHANICAL CHARACTERISTICS

Dimension: Height: 88 mm **Length:** 611 mm **Width:** 320 mm
PRODUCT WEIGHT: 5.5 kg
BODY MATERIAL: Die-cast aluminium **COLOUR** Grey
COVER / DIFFUSER MATERIAL: Tempered glass **FINITURE** Clear
REFLECTOR MATERIAL: Specular Aluminium **COLOUR** Metal
WIND SURFACED EXPOSED: 0.16 cm²
PROTECTION DEGREE: IP66
MECHANICAL IMPACTS PROTECTION DEGREE: IK09
GLOW WIRE: 960° - 30s.
QUANTITY PER BOX SINGLE/MULTIPLE/DELIVERY: 1//

CERTIFICATES AND STANDARDS

STANDARDS: CEI EN 60598-1, 2009/125/CE, 874/2012/CE, 2014/30/EU, 2014/35/EU, CEI EN 60598-2-3

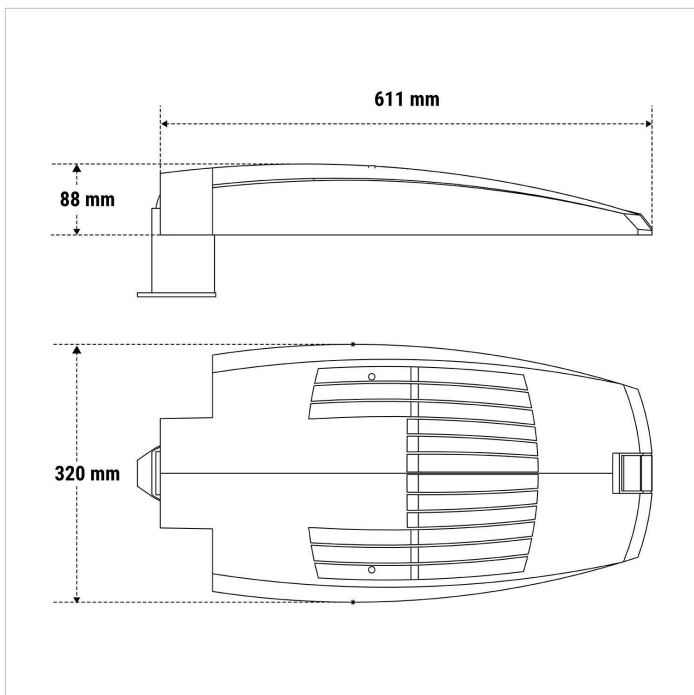


Strada LED



STRA LED UC 1X70 SD 4K

SYSTEM:SD X

Beghelli Code: **S70UCSD**

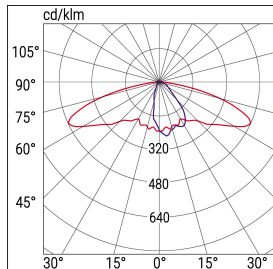

Accessories Home Automation (SD)



20104
TRASMETTITORE RADIO
DOMOTICO



21102
CENTRALE DOMOTICA SD-
LGFM



15022
MODULO RADIO DOMOTICO



15024
MODULO DALI



15034
MODULO 1-10V