

Ticinque LED

G.LUCE T5 LED AT AR IP65 SE LF

Beghelli Code: **8592**



SYSTEM:AT



Description: Emergency
EAN: 8002219725721

ELECTRICAL AND LIGHTING TECHNICAL CHARACTERISTIC

EQUIVALENT POWER: 36WGL W
LAMPHOLDER: None
SUPPLY VOLTAGE TYPE: AC
NOMINAL VOLTAGE AC: 230 V
VOLTAGE SUPPLY RANGE AC: 207 V÷253 V
FREQUENCY SUPPLY RANGE: 50 Hz÷60 Hz
MAX ABSORBED POWER NM: 3.4 W
EMERGENCY DIAGNOSTIC TYPE: AT
DURATION: 1 / 1.5 / 2 / 3 / 8 h
FLUX NM: 1250 / 1000 / 800 / 550 / 210 lm
FLUX WITH "AUTORIPARA" BATTERY: 2200 / 1650 / 1100 / 900 / 340 lm
BATTERY TYPE: LiFe
BATTERY: LiFe 9.6V 1.5Ah
REST MODE: optional
RECHARGING TIME: 12 h
DURATION TEST TIME: 1 h
DURATION TEST FREQUENCY: 26 week
FUNCTIONAL TEST FREQUENCY: 28 day
PICTOGRAM INCLUDED: n
VISIBILITY DISTANCE: 28 m
Ta: 0 °C÷40 °C
INSULATION CLASS: II
CRI: >80
CCT: 4000 K
LED NUMBER: 32
PHOTOBIOLOGICAL RISK: RG0

MOUNTING AND APPLICATIONS


ENVIRONMENT: Indoor/Outdoor
APPLICATION: Offices / Industrial Areas / 043 / Public Areas

MECHANICAL CHARACTERISTICS

Dimension: Height: 43 mm Length: 549 mm Width: 147 mm
PRODUCT WEIGHT: 2 kg
BODY MATERIAL: Polycarbonate **COLOUR** White RAL 9003
COVER / DIFFUSER MATERIAL: Transparent polycarbonate **FINITURE** Clear
REFLECTOR MATERIAL: Polycarbonate
PROTECTION DEGREE: IP65
MECHANICAL IMPACTS PROTECTION DEGREE: IK07
GLOW WIRE: 850° - 30s.
QUANTITY PER BOX SINGLE/MULTIPLE/DELIVERY: 1/6/

CERTIFICATES AND STANDARDS

STANDARDS: CEI EN 62034, 2009/125/CE, 874/2012/CE, 2014/30/EU, 2014/35/EU, CEI EN 60598-2-22, CEI EN 60598-2-2

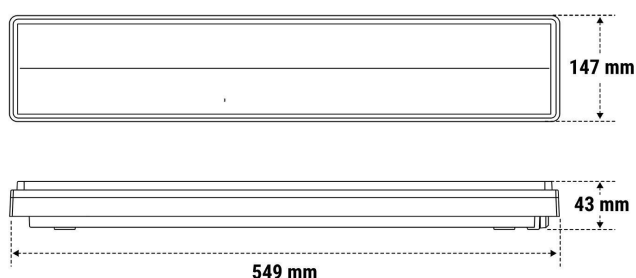


Ticinque LED



G.LUCE T5 LED AT AR IP65 SE LF

SYSTEM:AT

Beghelli Code: **8592**



Accessories to be order separately



RA06

SISTEMA BAT AR LI-FE
9.6V1.5AH

11582

ADES USCITA TICINQUE LED

11583

ADES SX TICINQUE LED



11584

ADES DX TICINQUE LED

11585

ADES BS TICINQUE LED



3905

GRIGLIA ILLUM 685X182X110