



BS UNO Modula

BS UNO MODULA RD 72W 4K


Order code 41306

EAN 8002219894526

CE


Technical specifications

Absorbed Power	72 W, 68 W, 64 W, 59 W
Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Ambient temperature (min)	-20 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
LED number	240
Out current (Qty max)	425
Photobiological risk	RG0
Colour consistency	SDCM3
Colour reflector	White
CRI color rendering	>80
Driver type	RD
Efficiency	167 lm/W, 168 lm/W, 169 lm/W, 171 lm/W
Energy class	D
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Glow wire strength	850 °C - 30s.
HACCP	Yes
Luminaire flux	12000 lm, 11400 lm, 10800 lm, 10100 lm
Luminous flux L70B10	150000 h
Luminous flux L70B50	200000 h
Luminous flux L80B10	90000 h
Luminous flux L80B20	100000 h
Luminous flux L80B50	130000 h
Luminous flux L90B10	50000 h
Luminous flux L90B50	60000 h
Mounting	Ceiling
Breaker B10 (Qty max)	15
Breaker B16 (Qty max)	24
Breaker C10 (Qty max)	15
Breaker C16 (Qty max)	24
Voltage supply range (max)	264 V
Voltage supply range (min)	198 V

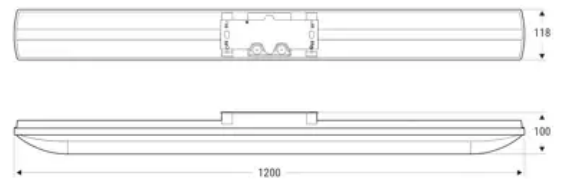

Installation and applications

Environment	Secondary Areas
Application	Industrial Areas, Production, Warehouses

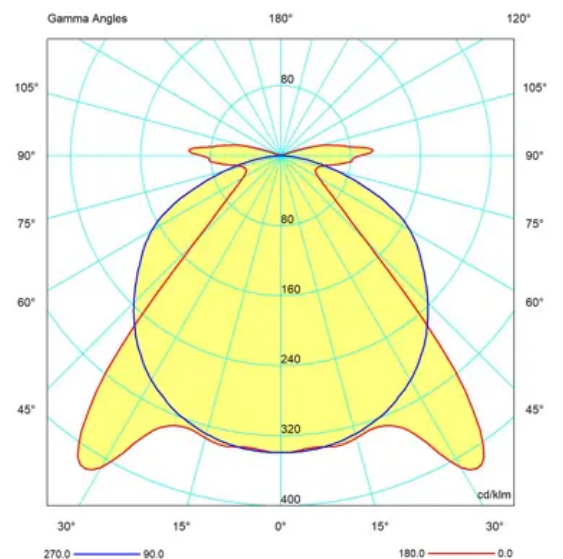

Mechanical specifications

Height	100 mm
Length	1200 mm
Width	118 mm
Weight	1.9 Kg
Body material	Polycarbonate
Colour housing	Grey RAL 7040
Cover material	Transparent polycarbonate
Diffuser finiture	Clear
Reflector material	White Lacquered Aluminium
Protection grade IP	IP65
Protection grade IK	IK09

Certifications and norms

-, EN 60598-2-22:2014 + AC:2015 +
AC:2016-05 + AC:2016-09 + A1:2020

Accessories



8063/1
GR STAFFA UNICA GRIGLIA
8063



8063
BS100 GRIGLIA PROTEZ
36/58W

Inverter accessories



15059
MODULO LG24



15068
MODULO TR 6W 1/3H BS
UNO



15060
MODULO LG230