

X-Cube LED Up & Down

Indoor LED luminaire



Material:

- color: white

Degree of protection: IP44, IK07

Working temp.: -20 ÷ +40°C


Rated voltage: 230 V/50 Hz

Life: 15.000h

Beam angle: 60° up+down

Mounting: wall

Application: corridors, staircases, entrance areas, living rooms

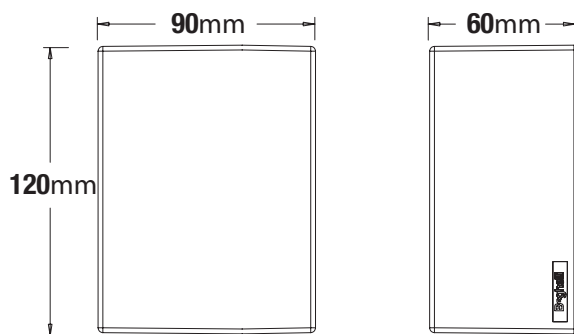

Up & Down



X-CUBE ECOLED										
Code	EAN	W	Candelas	Lum. flux (lm)	Color temp. K	lm/W	Dimensions	CRI	Package sing./min./multipack	EEC
86128	8002219735867	8	300	480	3000	60	90x120x60	>80	1/10/40	A
86129	8002219735874	8	300	480	4000	60	90x120x60	>80	1/10/40	A