

Performance according to EN 1838


Lighting	C90-C270	C90-C180		C0-C180	
		Wall	Ceiling	Wall	Ceiling
3	3	-	30	-	-
3	3	-	-	-	8
8	8	-	12	-	8

Lighting PEXSSVPIZIPSXKXLIQXVI
PMRIMXLSYXVIGXMSRW)QE)QMR


Lighting P\ EXSSVPIZIPMXLSYX
VIGXMSRW)QE)QMR

41VSVOERGIIMXLVIIIRGIXSPYQMRMVI 3VHIVSHI 1000lm


1EMRXIRERIGIGSIEMIRX

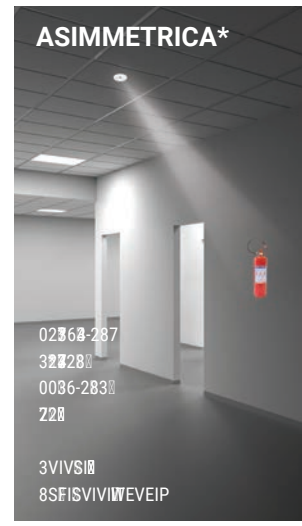


LUNGALUCE 80%




LARGALUCE 91%



ALTALUCE 90%



ASIMMETRICA 90%




.05%5514; - VDGTFGTGFUGRCTCVGN



13(90)
361%

ORMA LASER13(90)

0EIVQMVGSTVSNIGXSVXLEXIQM
FVMKX ERH TVSQMRIRX EV
LETIH EQIXVMGEP GSRMGEF
FIEQ TVSHYGMRK E ZMVX
TMGXSKVEQXSMRHMGEIXLIRI
IGETI VSYXI 8S TSMXMSR XLI
MQEKISRXLIKVSYRHEXXLIQSX
YMXEFPI TSMRXERHMXLXLIQSVV
MKREP SVMIRXEXMSR MQTP VS
XLIFSHSXLIHIZMGI

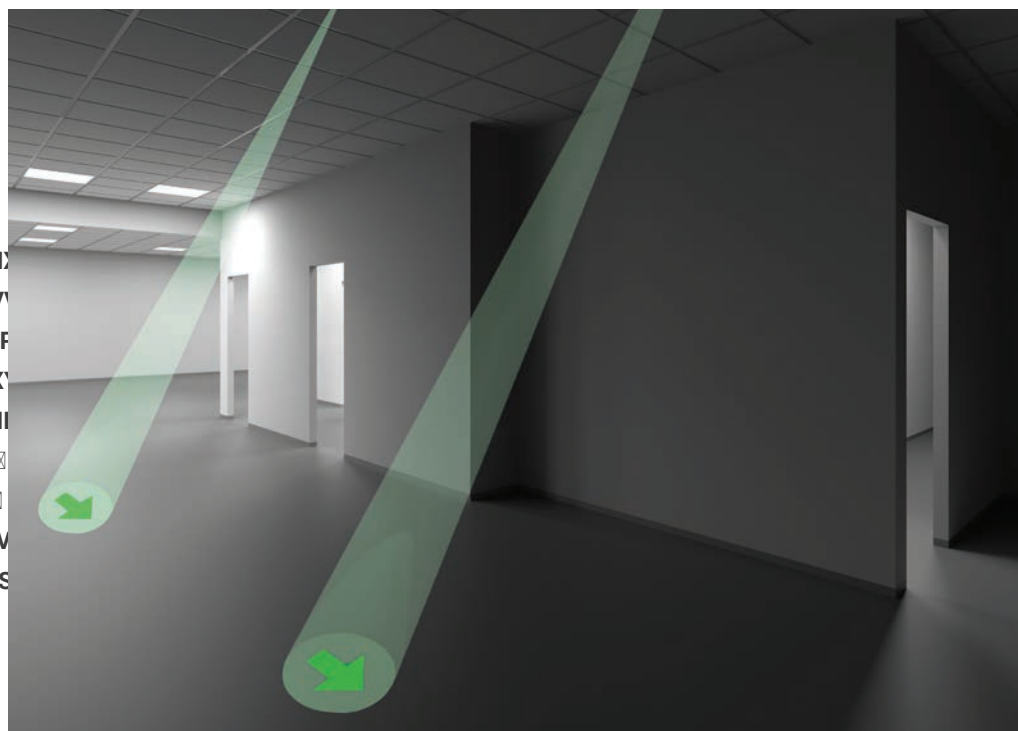

eco