

Downlight Ultra Compact LED





Ultracompact recessed luminaire with a radial LED source, its opal diffuser provides an uniform diffusion of the light, eliminating glare. The extremely reduced dimensions make it easy to install also in extremely small spaces. It fits in space that requires lighting.

GENERAL CHARACTERISTICS

- Equivalent Power*** 8 W
- Power supply** 220/240 VAC - 50/60 Hz
- Standard** EN60598-1; EN60598-2-2; EN 62471
- UGR** <25
- Protection grade** IP42
- Working temp.** -20°C ÷ +40°C
- Mounting** Recessed
- Body** PC
- Diffuser** PC opal
- Driver** Electronic integrated
- Colour temperature** 3000K, 4000K
- Life** 35 000 h ^φ

* Equivalent power for comparison with fluorescent tube fixtures

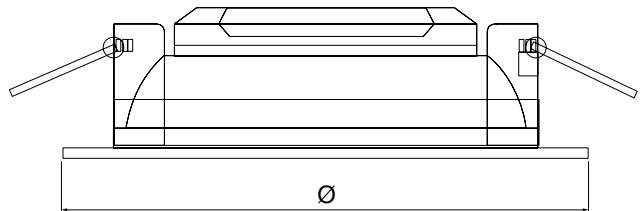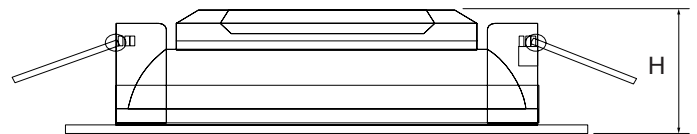


Power W	• Dimensions (mm) • Ø H	Recessed hole	Weight kg
8	85 65	70	0,07

**Downlight Ultra Compact LED
REPLACES
COMPACT FLUORESCENT FIXTURES
50W**



Fixing springs

Polar Diagram

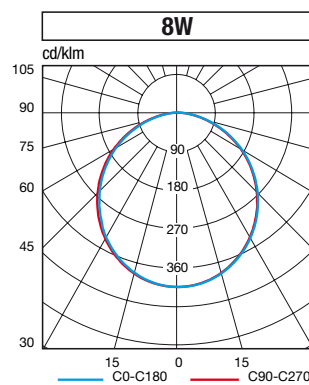

Downlight Ultra Compact LED

W	Code	Description	EAN	Power W	N° LED	Colour Temp. K	CRI	Flux of LED (lm)	Flux of fixture (lm)	lm/W	Energy Class	Package
8	71050	DWL LED 8W 3K	8002219722690	8	24	3000K	>80	1080	720	90	A++	1/12
8	71051	DWL LED 8W 4K	8002219722706	8	24	4000K	>80	1080	720	90	A++	1/12