


# Luna LED Top

Ceiling and wall LED luminaires IP65



## Material:

- body: thermoplastic, UV stabilized, high impact resistance
- color: white or gray
- reflector: steel sheet
- diffuser: opal, UV stabilized

**Ambient temperature:** -15 ÷ 35°C (0 ÷ 35°C version with inverter)

**Degree of protection:** IP65

**Rated voltage:** 230 V/50 Hz


**Control gear:** LED driver (DALI driver on request), the luminaires are offered also in emergency version (autonomy 3H, AutoTest)

**Service life:** 50 000 hours

**Mounting:** on a ceiling or on a wall, incl. flammable surfaces

**Application:** hospitals, laboratories, entry halls, reception desks, corridors, restaurants, conference rooms

Luminaires are supplied as standard with opal diffuser IK08. For degree of impact resistance IK10 it is necessary to order polycarbonate diffuser - see version on request.

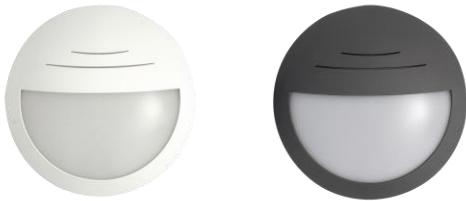

Luminaire in decorative diffuser option.

Code	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	Dimensions (mm)	Kg	Corpus
A59-10215	10	1 112	117	3 000	>80	Ø295 × 100	1,1	white
A59-10216	14	1 554	112	3 000	>80	Ø295 × 100	1,1	white
A59-10217	10	1 172	123	4 000	>80	Ø295 × 100	1,1	white
A59-10218	14	1 638	118	4 000	>80	Ø295 × 100	1,1	white
A59-10219	10	1 112	117	3 000	>80	Ø295 × 100	1,1	gray
A59-10220	14	1 554	112	3 000	>80	Ø295 × 100	1,1	gray
A59-10221	10	1 172	123	4 000	>80	Ø295 × 100	1,1	gray
A59-10222	14	1 638	118	4 000	>80	Ø295 × 100	1,1	gray

Version on request:

Order code with suffix /L: Luminaire fitted with decorative diffuser

Order code with suffix /S: Luminaire equipped with microwave motion sensor (with on-off control)

Order code with suffix /PC: Luminaire fitted with polycarbonate cover to increase impact resistance (IK10)

Order code with suffix /DL: Luminaire equipped with dimmable DALI driver

Order code with suffix /TR3: Luminaire is equipped with 3H emergency autonomy module

Order code with suffix /AT: Luminaire is equipped with 3H emergency autonomy module with its own battery - AutoTest