



Stagna Flat


STAGNA FLAT IP65 150CM 45W 4K

Order code **75458**

EAN 8002219895448

Technical specifications

| | |
|----------------------------|---------------------------------|
| Absorbed Power | 45 W |
| Supply voltage type | AC |
| Nominal voltage (AC) | 230 Vac |
| Ambient temperature (min) | -20 °C |
| Ambient temperature (max) | 40 °C |
| Insulation class | II |
| CCT light tone | 4000 K |
| Colour consistency | SDCM2 |
| CRI color rendering | >80 |
| Ballast | For constant current LED |
| Efficiency | 120 lm/W |
| Equivalent power | 2x58w |
| Frequency (max) | 60 Hz |
| Frequency (min) | 50 Hz |
| Power factor | 0.9 |
| Glow wire strength | 550 °C - 30s. |
| MTBF driver | 25000 h |
| Luminaire flux | 5400 lm |
| Mounting | Ceiling |
| Voltage supply range (max) | 240 V |
| Voltage supply range (min) | 220 V |

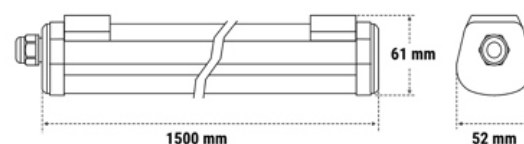

Installation and applications


| | |
|-------------|--|
| Environment | Secondary Areas |
| Application | Offices, Production, Warehouses |

Mechanical specifications


| | |
|---------------------|----------------|
| Height | 40 mm |
| Length | 1500 mm |
| Width | 72 mm |
| Weight | 1.9 Kg |
| Colour housing | Grey |
| Protection grade IP | IP65 |
| Protection grade IK | IK08 |

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-1:1989, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019

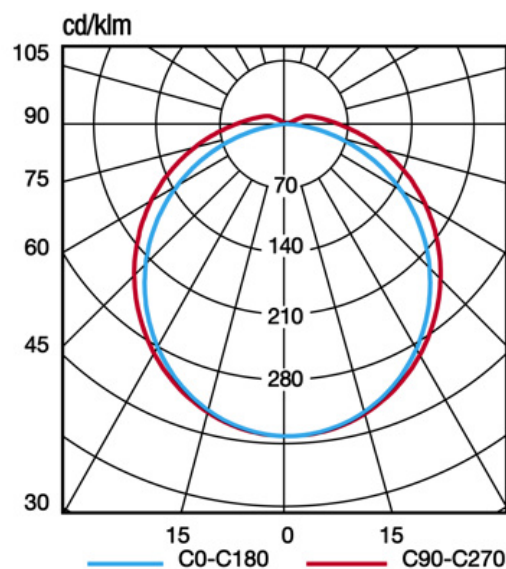

Accessories



201954000
KIT 2 GANCI SOSPEN ST EASY
LED