




# BS UNO Modula

BS UNO MODULA SDB 51W 4K



Order code 41324

EAN 8002219894700



## Technical specifications



|                            |                                 |
|----------------------------|---------------------------------|
| Absorbed Power             | 51 W                            |
| Supply voltage type        | AC/DC                           |
| Nominal voltage (AC)       | 230 Vac                         |
| Ambient temperature (min)  | -20 °C                          |
| Ambient temperature (max)  | 40 °C                           |
| Insulation class           | II                              |
| CCT light tone             | 4000 K                          |
| LED number                 | 192                             |
| Out current (Qty max)      | 350                             |
| Photobiological risk       | RG0                             |
| Colour consistency         | SDCM3                           |
| Colour reflector           | White                           |
| CRI color rendering        | >80                             |
| Driver type                | SDB                             |
| Ballast                    | For constant current LED (DALI) |
| Efficiency                 | 157 lm/W                        |
| Energy class               | C                               |
| Frequency (max)            | 60 Hz                           |
| Frequency (min)            | 50 Hz                           |
| Glow wire strength         | 850 °C - 30s.                   |
| HACCP                      | Yes                             |
| Light sensor               | Yes                             |
| Luminaire flux             | 8000 lm                         |
| Luminous flux L70B10       | 160000 h                        |
| Luminous flux L70B50       | 220000 h                        |
| Luminous flux L80B10       | 100000 h                        |
| Luminous flux L80B20       | 110000 h                        |
| Luminous flux L80B50       | 140000 h                        |
| Luminous flux L90B10       | 60000 h                         |
| Luminous flux L90B50       | 70000 h                         |
| Mounting                   | Ceiling                         |
| Nominal voltage (DC)       | 216 Vdc                         |
| Voltage supply range (DC)  | 176÷250 VOLT                    |
| Voltage supply range (max) | 265 V                           |
| Voltage supply range (min) | 93 V                            |

## Installation and applications

|             |                                          |
|-------------|------------------------------------------|
| Environment | Secondary Areas                          |
| Application | Industrial Areas, Production, Warehouses |

## Mechanical specifications

|        |        |
|--------|--------|
| Height | 100 mm |
|--------|--------|

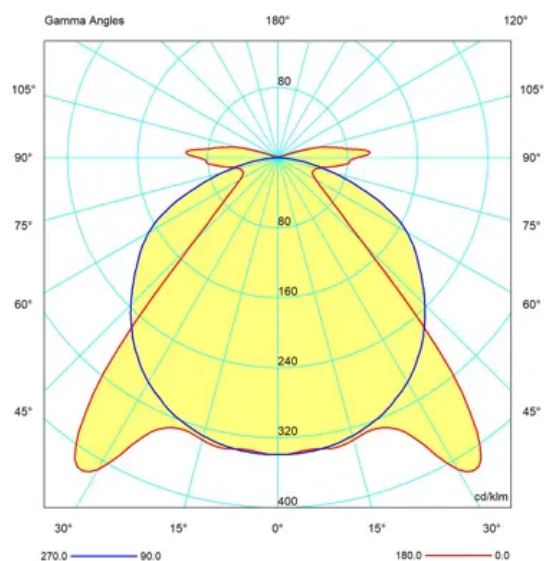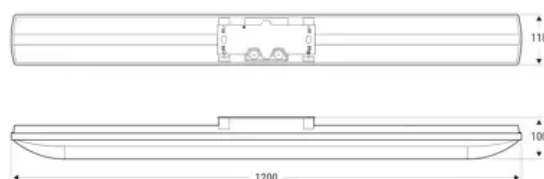

|                     |                                  |
|---------------------|----------------------------------|
| Length              | <b>1200 mm</b>                   |
| Width               | <b>118 mm</b>                    |
| Weight              | <b>1.9 Kg</b>                    |
| Body material       | <b>Polycarbonate</b>             |
| Colour housing      | <b>Grey RAL 7040</b>             |
| Cover material      | <b>Transparent polycarbonate</b> |
| Diffuser finiture   | <b>Clear</b>                     |
| Reflector material  | <b>White Lacquered Aluminium</b> |
| Protection grade IP | <b>IP65</b>                      |
| Protection grade IK | <b>IK09</b>                      |

### Certifications and norms

-, EN 60598-2-22:2014 + AC:2015 +  
AC:2016-05 + AC:2016-09 + A1:2020

### Accessories



**8063**  
BS100 GRIGLIA PROTEZ  
36/58W




**15067**  
MOD SD RADIO STAGNA  
MODULA




**8063/1**  
GR STAFFA UNICA GRIGLIA  
8063

### Home automation accessories



**15062**  
SENSORE PRES BLE UFFICI  
IP40



**15064**  
CONCENTRATORE WIFI BLE



**15065**  
TRASMETTITORE BLE



**15063**  
SENSORE PRESE BLE INDUSTRIA  
IP65



**21102**  
CENTRALE DOMOTICA SD-  
LGFM



**15074**  
CONC WiFi BLE ETHERNE  
EASY BOX

### Inverter accessories



**15059**  
MODULO LG24



**15060**  
MODULO LG230



**15068**  
MODULO TR 6W 1/3H BS  
UNO