

Ticinque LED

LED Emergency





**1250
lumen**

GENERAL CHARACTERISTICS

- Power *** 18, 24 W
- Power supply** 230Vac ± 10% 50Hz
- Operation** Permanent (SA), Non permanent (SE)
- Standard** EN 60598-1, EN 60598-2-22, UNI EN 1838
- Protection grade** IP65, IP42
- Autonomy** 1, 2, 3h - 8h (model 18W)
- Working temp.** 0 ÷ +40 °C
- Working temp.** 0°C ÷ +40°C
- Installazione** wall, ceiling
- Housing** White Polycarbonate RAL 9003
- Optics** Symmetrical, white
- Louvre** Transparent polycarbonate
- Light source** LED

* Indicative power for comparison with fluorescent tube fixtures

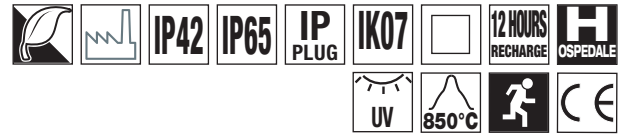

Power * W	• Dimensions (mm) •			DV diffuser
	L	B	H	
18	549	147	43	25 m

* Indicative power for comparison with fluorescent tube fixtures

Accessories

supplied

Order code	Description
-	no. 3 IP PLUG MEMBRANES PRE-MOUNTED ON THREE EXITS (HIGH, RIGHT, LEFT)
-	no. 1 INVISIBLE CONNECTOR COMPLETE WITH IP PLUG MEMBRANE

Accessories

to be ordered separately

Order code	Description
11582EN	ADES EXIT TICINQUE LED
11583	ADES LEFT TICINQUE LED
11584	ADES RIGHT TICINQUE LED
11585	ADES DOWN TICINQUE LED




CUNEIFORM DOUBLE REFLECTOR WITH LED SIGNAL

CEILING MOUNTING



WALL MOUNTING



CABLE GLAND



- CABLE GLAND PG16/PG20

supplied

CABLE GROMMETS



- 3 IP CABLE GROMMETS

supplied

SAFETY SIGNALING (Visibility Distance VD in table)



- LABELS IN ACCESSORIES TABLE

to be ordered separately

TR Granluce

Traditional

W	Order code	Description	Model	Autonomy	Battery	N° LED	Average Flux SE lm	Average Flux SA lm	Power consump. max W	Weight kg	Pack single
24	8590	GRANLUCE T5LED IP65 SE2H	SE	2h	PB 6V 4Ah	32	800		5	2	1/6
24	8591	GRANLUCE T5LED IP65 SA2H	SA	2h	PB 6V 4Ah	32	800	180	5/8	2	1/6

TR

Traditional **IP42**

W	Order code	Description	Model	Autonomy	Battery	N° LED	Average Flux SE lm	Average Flux SA lm	Power consump. max W	Weight kg	Pack single
18	8584	TICINQUE IP42 LED 18WSE8P	SE	8h	PB 6V 4Ah	32	260		2	1.8	1/6
18	8585	TICINQUE IP42 LED 18WSA8P	SA	8h	PB 6V 4Ah	32	260	180	2/4	1.8	1/6

TR

Traditional **IP65**

W	Order code	Description	Model	Autonomy	Battery	N° LED	Average Flux SE lm	Average Flux SA lm	Power consump. max W	Weight kg	Pack single
18	8586	TICINQUE IP65 LED 18WSE8P	SE	8h	PB 6V 4Ah	32	260		2	1.8	1/6
18	8587	TICINQUE IP65 LED 18WSA8P	SA	8h	PB 6V 4Ah	32	260	180	2/4	1.8	1/6

AT Granluce

Autotest

W	Order code	Description	Model	Autonomy	Battery	N° LED	Average Flux SE lm	Average Flux SA lm	Power consump. max W	Weight kg	Pack single
24	8592	GRANLUCE T5LED AT IP65 SE123H	SE	1-2-3h	PB 6V 4Ah	32	1250/800/550		5	2	1/6
24	8593	GRANLUCE T5LED AT IP65 SA123H	SA	1-2-3h	PB 6V 4Ah	32	1250/800/550	400	5/15	2	1/6