

## Downlights

**Material:**

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9016
- reflector: polished aluminium sheet

**Degree of protection:** IP 44


**Rated voltage:** 230V/50Hz

**Control gear:** low loss ballast or electronic ballast; the luminaires are offered also in emergency version

**Mounting:** recessed mounting in panel ceilings with maximum width 18mm

**Accessories:** opal glass cover (supplied with the luminaire)

**Application:** restaurants, reception desks, shops, entry halls, hotels, corridors and stairways

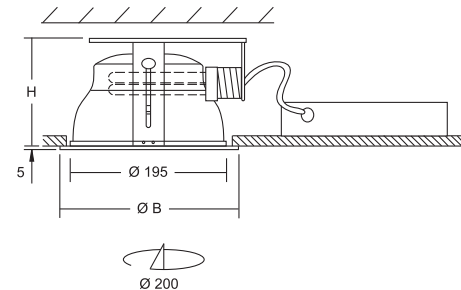

Code	Power	Lamp	Cap	ØBxH (mm)	Kg
82-014/113/□Z	1x13W	compact fl. lamp	G24d(q)-1	220x70	1,6
82-014/118/□Z	1x18W	compact fl. lamp	G24d(q)-2	220x70	1,6
82-014/126/□Z	1x26W	compact fl. lamp	G24d(q)-3	220x70	1,7
82-014/213/□Z	2x13W	compact fl. lamp	G24d(q)-1	220x70	1,9
82-014/218/□Z	2x18W	compact fl. lamp	G24d(q)-2	220x70	1,9
82-014/226/□Z	2x26W	compact fl. lamp	G24d(q)-3	220x70	2,1

□ - E (low loss ballast - parallel compensation)  
 - C (electronic ballast)