


Arietis M LED - versatile installation

Recessed LED luminaires IP54 – ceiling modules M600 - upper mounting
– surfaced on ceiling

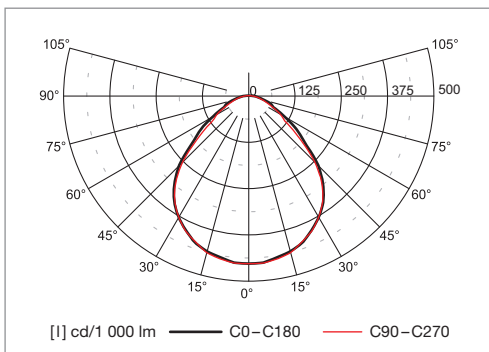

Material:

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003
- diffuser: frosted acrylic

Degree of protection: IP54

Rated voltage: 230 V/50 Hz

Control gear: LED driver, the luminaires are offered also in emergency version

Mounting: versatile mounting into ceiling modules M600 or surfaced mounting on ceiling

Accessories: (to be ordered separately)

19355 – inverter LED AT/LG 6W 55V 123H

Application: operating theaters, hospitals, laboratories, precincts with high humidity and dustiness, precincts demanding high sanitary codes

MOUNTING INTO CEILING MODULE M600 (upper mounting)



MTBF of power supply** 50 000 h
(MTBF: Mean Time Between Failures)

Luminous flux decrease:** > 50 000 h (L80B20)

Color temp. stability: 3 SDCM

** Applies to ambient temperature 25°C

SURFACED MOUNTING ON CEILING



Power* W	Code	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	EEC	L × B × H (mm)	Kg
4×14	36-A99/414/NM	41	4 200	102	4 000	>80	A+	595 × 595 × 57	5.5

* Indicative power just for fluorescent fixtures comparison purpose