


Ceiling and suspended luminaires – separate/coupling in lines

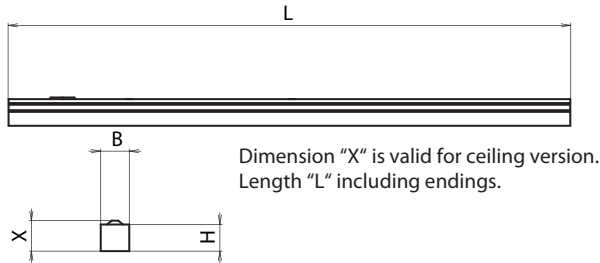

Material:

- body: anodized aluminium profile
- color: gray
- louvre: highly polished parabolic (IP20)
- diffuser: frosted acrylic glass (IP40)

Degree of protection: IP20, IP40

Rated voltage: 230V/50Hz

Control gear: electronic ballast; the luminaires are offered also in emergency version

Mounting:

86-00 - ceiling/suspended - separate mounting (endings are supplied with luminaire)

86-01 - ceiling/suspended - coupling in lines (endings must be ordered separately)

Accessories: (must be ordered separately)

99-0085 – wire suspensions, transparent power cable 3x1,5mm² (120cm) - set for one luminaire

99-0087 – wire suspensions, transparent power cable 5x1,5mm² (120cm) - set for one luminaire

99-0094 – transparent power cable 200 cm (3x1,5mm²)

99-0095 – transparent power cable 200 cm (5x1,5mm²)

99-0096 – wire suspension 1pc 200 cm (for one coupling in lines luminaire two pieces needed)

99-0101 – ending (1 pc) for ceiling version coupling in lines (for louvre IP20)

99-0123 – ending (1 pc) for ceiling version coupling in lines (for diffuser IP40)

99-0125 – coupler for coupling in lines for diffuser IP40 (couplers for IP20 are included)

Application: restaurants, shops, hotels, finance houses, corridors and stairways



Available emergency power-packs:

Separate mounting:

- 1h autonomy (TR1) for versions 28-54-35-80W
 - 3h autonomy (TR3) for version 28W only
- (Ord. code for example: 86-003/135/CB+++TR3)

Coupling in lines:

- 1h autonomy (TR1) for versions 35W & 80W only
 - 3h autonomy (TR3) for version 28W only
- (Ord. code for example: 86-013/128/CM+++TR3)

AT, LG options are not available.

Available emergency modules:

Luminaire version with LED EM-module (TRLED) is extended by 100mm and equipped with EM-module at one end of the luminaire.

(Ord. code for example: 86-013/154/CB+++TRLED)

Available options:

	Code	Power	Lamp	Cap	LxBxHxX (mm)
Separate mounting	86-003/114/C ²	1x14W	T5 lamp	G5	583x60x56x61
	86-003/124/C ²	1x24W	T5 lamp	G5	583x60x56x61
	86-003/121/C ²	1x21W	T5 lamp	G5	883x60x56x61
	86-003/139/C ²	1x39W	T5 lamp	G5	883x60x56x61
	86-003/128/C ²	1x28W	T5 lamp	G5	1183x60x56x61
	86-003/154/C ²	1x54W	T5 lamp	G5	1183x60x56x61
	86-003/135/C ²	1x35W	T5 lamp	G5	1483x60x56x61
	86-003/180/C ²	1x80W	T5 lamp	G5	1483x60x56x61

	Code	Power	Lamp	Cap	LxBxHxX (mm)
Coupling in lines	86-013/114/C ²	1x14W	T5 lamp	G5	580x60x56x61
	86-013/124/C ²	1x24W	T5 lamp	G5	580x60x56x61
	86-013/121/C ²	1x21W	T5 lamp	G5	880x60x56x61
	86-013/139/C ²	1x39W	T5 lamp	G5	880x60x56x61
	86-013/128/C ²	1x28W	T5 lamp	G5	1180x60x56x61
	86-013/154/C ²	1x54W	T5 lamp	G5	1180x60x56x61
	86-013/135/C ²	1x35W	T5 lamp	G5	1480x60x56x61
	86-013/180/C ²	1x80W	T5 lamp	G5	1480x60x56x61

² - B (highly polished parabolic louvre), - M (frosted acrylic glass)