

# Indica LED 30m

## LED Signs



### GENERAL CHARACTERISTICS

**Power** 1,6-3,2 W

**Power supply** 230Vac ± 10% 50Hz

**Operation** HT, Permanent (SA)/Public performance (PS) selectable with DIP switch in versions LG and LGFM

**Standard** EN 60598-1, EN 60598-2-2, EN 60598-2-22, UNI EN 1838, UNI 11222, DIN 4844-1

**Protection grade** IP40 single-sided version, IP41 suspended version

**Autonomy** 1h, 2h, 3h selectable with DIP switch in the LG and LGFM versions


**Working temp.** 0°C ÷ +40°C

**Mounting** wall, false ceiling, ceiling with rods, suspended on wall, suspended on ceiling


**Housing** Aluminium frame and polycarbonate bracket RAL 7035

**Optics** high-efficiency back light system

**Light source** LED

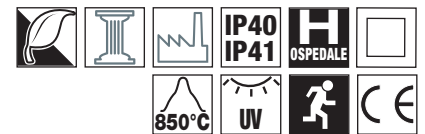


Wall double-sided version




DV	L	B	H
30	366	252	36

Ceiling double-sided version




DV	L	B	H
30	335	216	36

Recessed single-sided version



DV	L	B	H
30	335	185	15

Wall single-sided version



DV	L	B	H
30	335	185	38

## Accessories

supplied

Order code	Description
-	DIFFUSER R/L/DOWN

## Accessories

to be ordered separately

Order code	Description
19380	RODS 250MM INDICA DF
19381	RODS 500MM INDICA DF
19382	RODS 1000MM INDICA DF
19383	WIRE SUSPENSION 2MT INDICA DF
19386	RECESSED BRACKET FOR FALSE CEILING 30M

## SUSPENDED MOUNTING ON WALL



## SUSPENDED MOUNTING ON CEILING



## SUSPENDED SUSPENDED MOUNTING



## SUSPENDED MOUNTING ON CEILING WITH RODS



**19383** WIRE SUSPENSION max 100 *to be ordered separately*

**19380** RODS 250MM INDICA DF *to be ordered separately*

## RECESSED SUSPENDED MOUNTING ON FALSE CEILING



**19381** RODS 500MM INDICA DF

*to be ordered separately*

**19382** RODS 1000MM INDICA DF

**19386** FALSE CEILING RECESSED BRACKET 30 m *to be ordered separately*

**Double-sided version** IP41

## AT Autotest

W	Order code	Description	Model	Autonomy	Battery	N° LED	Absorption W	Weight kg	Pack
3,2	<b>19302</b>	INDICA LED DF30M AT SA 1H	SA	1h	NiMH 7,2V 0,6Ah	48	4,2	0,8	6

## LG Logica

W	Order code	Description	Model	Autonomy	Battery	N° LED	Absorption W	Weight kg	Pack
3,2	<b>19304</b>	INDICA LED DF30M LG SA/PS 1/2/3H	SA/PS	1/2/3h	NiMH 7,2V 0,6Ah	48	4,2	0,8	6

## LGFM Logica FM

W	Order code	Description	Model	Autonomy	Battery	N° LED	Absorption W	Weight kg	Pack
3,2	<b>19306</b>	INDICA LED DF30M LGFM SA/PS 1/2/3H	SA/PS	1/2/3h	NiMH 7,2V 0,6Ah	48	4,2	0,8	6

## SLG

W	Order code	Description	Model	Autonomy	Battery	N° LED	Absorption W	Weight kg	Pack
3,2	<b>17460</b>	INDICA LED DF30M SLG	-	-	-	48	3,7	0,8	6

## SICURO 24V

W	Order code	Description	Model	Autonomy	Battery	N° LED	Absorption W	Weight kg	Pack
3,2	<b>17494</b>	INDICA LED DF30M SLGS 24V	-	-	-	48	3,7	0,8	6

## HT Mains voltage power supply (ca 230V 50 Hz - cc 216V)


W	Order code	Description	Model	Autonomy	Battery	N° LED	Absorption W	Weight kg	Pack
3,2	<b>19300</b>	INDICA LED DF30M HT	-	-	-	48	3,7	0,8	6

\* Minimum flux guaranteed according to EN 60598-2-22

## WALL MOUNTING



## RECESSED WALL MOUNTING ON BOX 506

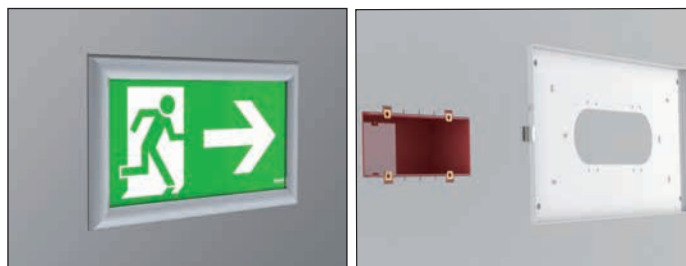

- ADAPTER FOR BOXES 506

supplied

**Single-sided version** IP40

## AT Autotest

W	Order code	Description	Model	Autonomy	Battery	N° LED	Absorption W	Weight kg	Pack
1,6	<b>19312</b>	INDICA LED SF30M AT SA 1N	SA	1h	NiCd 7,2V 0,75Ah	24	3	1,1	6

## LG Logica

W	Order code	Description	Model	Autonomy	Battery	N° LED	Absorption W	Weight kg	Pack
1,6	<b>19314</b>	INDICA LED SF30M LG SAPS 1/2/3H	SA/PS	1/2/3h	NiMH 7,2V 1.2Ah	24	3	1,1	6

## LGFM Logica FM

W	Order code	Description	Model	Autonomy	Battery	N° LED	Absorption W	Weight kg	Pack
1,6	<b>19316</b>	INDICA LED SF30M LGFM SAPS 1/2/3H	SA/PS	1/2/3h	NiMH 7,2V 1.2Ah	24	3	1,1	6

## SLG

W	Order code	Description	Model	Autonomy	Battery	N° LED	Absorption W	Weight kg	Pack
1,6	<b>17462</b>	INDICA LED SF30M SLG	-	-	-	24	2,5	1,1	6

## SICURO 24V

W	Order code	Description	Model	Autonomy	Battery	N° LED	Absorption W	Weight kg	Pack
1,6	<b>17496</b>	INDICA LED SF30M SLGS 24V	-	-	-	24	2,5	1,1	6

## HT Mains voltage power supply (ca 230V 50 Hz - cc 216V)

W	Order code	Description	Model	Autonomy	Battery	N° LED	Absorption W	Weight kg	Pack
1,6	<b>19310</b>	INDICA LED SF30M HT	-	-	-	24	2,5	1,1	6

\* Minimum flux guaranteed according to EN 60598-2-22

## QUICK CONNECTION BRACKET FOR MAXIMUM MOUNTING VERSATILITY

The frame, in extruded aluminium, has been designed as a fixing track. This particular conformation, as well as making the Indica LED more sturdy and rigid, allows the fixing bracket to be applied on all sides of the fixture.

The polycarbonate diffusers can be removed without the aid of special tools. Simplicity, versatility and sturdiness are the basic principles of the Indica LED project. All of this is achieved with unprecedented luminosity of the sign.



Bracket position for mounting  
on the ceiling

Bracket position for suspended  
mounting on the left



Bracket position for suspended mounting  
on the right