
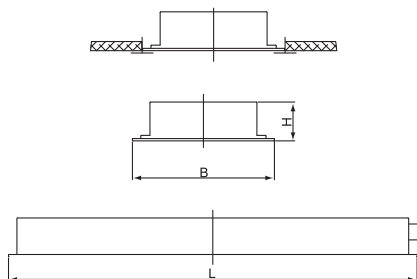


arietis | 36-04, 36-05

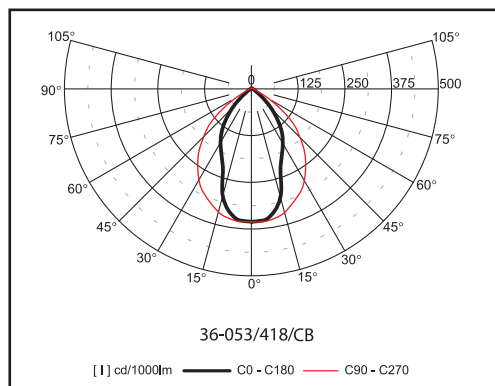

□ - E (low loss ballast)
- C (electronic ballast)

Recessed luminaires IP65

- inlay mounting 36-04

- universal mounting 36-05



Material:

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003
- louvre: highly polished parabolic louvre
- cover: safety hardened glass

Degree of protection: IP 65

Rated voltage: 230V/50Hz

Control gear: low loss ballast or electronic ballast, dimmable ballast by request; the luminaires are offered also in emergency version

Mounting: ceiling systems M600 - inlay mounting (36-04); ceiling systems M625 - inlay mounting and mounting in plaster ceilings (36-05)

Accessories: steel holders (are components of the luminaire - for 36-05)

Application: chemical laboratories, precincts with high humidity and dustiness, hospitals, precincts demanding high sanitary codes

Code	Power	Lamp	Cap	LxBxH (mm)	Hole cut out	Module	Kg
36-043/236/□ BT	2x36W	T8 lamp	G13	1197x297x100	-	M600	8,7
36-043/418/□ BT	4x18W	T8 lamp	G13	595x595x122	-	M600	10,1
36-043/128/CBT	1x28W	T5 lamp	G5	1197x297x110	-	M600	8,7
36-043/135/CBT	1x35W	T5 lamp	G5	1497x297x100	-	M600	12,5
36-043/228/CBT	2x28W	T5 lamp	G5	1197x297x100	-	M600	8,7
36-043/235/CBT	2x35W	T5 lamp	G5	1497x297x100	-	M600	12,5
36-043/414/CBT	4x14W	T5 lamp	G5	595x595x122	-	M600	10,1
36-044/336/□ BT	3x36W	comp. fl. lamp	2G11	595x595x122	-	M600	8,9
36-044/355/C BT	3x55W	comp. fl. lamp	2G11	595x595x122	-	M600	8,9
36-053/236/□ BT	2x36W	T8 lamp	G13	1247x311x100	1215x297	M625	8,7
36-053/418/□ BT	4x18W	T8 lamp	G13	622x622x122	591x608	M625	10,1
36-053/128/CBT	1x28W	T5 lamp	G5	1247x311x100	1215x297	M625	8,7
36-053/135/CBT	1x35W	T5 lamp	G5	1547x311x100	1515x297	M625	12,5
36-053/228/CBT	2x28W	T5 lamp	G5	1247x311x100	1215x297	M625	8,7
36-053/235/CBT	2x35W	T5 lamp	G5	1547x311x100	1515x297	M625	12,5
36-053/414/CBT	4x14W	T5 lamp	G5	622x622x122	591x608	M625	10,1
36-054/336/□ BT	3x36W	comp. fl. lamp	2G11	622x622x122	591x608	M625	8,9
36-054/355/C BT	3x55W	comp. fl. lamp	2G11	622x622x122	591x608	M625	8,9