

Kubus65



High protection class exit sign luminaire: Casing made of sheet steel or sheet stainless steel with frame cover and a clear insert. Lighting control is provided by a specular aluminium reflector. Single or double-sided escape route signage is provided thanks to self-adhesive films.

Versions for wall mounting or with accessories for ceiling mounting or wire or rod suspension mounting, or mounting on brackets.



Mounting types



Mounting types with accessories



Technical data

Mounting options:
surface wall mounting, surface ceiling mounting, suspension,
bracket suspension

Body:
sheet steel, white (RAL 9003)
stainless steel

Cover:
sheet steel with methacrylate pane, clear or
stainless steel with methacrylate pane, clear

Reflector:
aluminium, specular

Decentralized supply

Protection class: III

Mains supply:
24 V +/- 20% DC

Battery supply:
24 V +/- 20% DC

Ambient temperature:
-20 to +40 °C

Central supply

Protection class: I

Mains supply:
198V-254V/50Hz

Battery supply:
EVG: 110V - 276V
Sleb/Alog: 176V - 276V

Ambient temperature:
-20 to +40 °C

Decentralized supply / Central supply



Surface wall mounting (single faced indication)

T93060-S24	T93060E	T93060S	T93060A	32m	48	3.2W	4.3W	7.0 VA / 5.4W
-------------------	----------------	----------------	----------------	-----	----	------	------	---------------

Surface ceiling mounting, suspension, bracket suspension, (double faced indication)¹

T93061-S24	T93061E	T93061S	T93061A	32m	48	3.2W	4.3W	7.0 VA / 5.4W
-------------------	----------------	----------------	----------------	-----	----	------	------	---------------

Stainless steel

Surface wall mounting (single faced indication)

T93062-S24	T93062E	T93062S	T93062A	32m	48	3.2W	4.3W	7,0 VA / 5,4W
-------------------	----------------	----------------	----------------	-----	----	------	------	---------------

Surface ceiling mounting. suspension. bracket suspension. (double faced indication)¹



T93063-S24	T93063E	T93063S	T93063A	32m	48	3.2W	4.3W	7,0 VA / 5,4W
-------------------	----------------	----------------	----------------	-----	----	------	------	---------------

¹ For surface mounting and all suspended versions. please order required accessories separately

Please order mounting accessories separately


Order code	Description
Sheet steel stainless steel	
F95612 F95613	Adaptor for ceiling mounting
F95603 F95608	Rectangular suspension, 100mm
F95604 F95609	Suspension rod, 500 mm
F95605 F95610	Suspension rod, 1000mm
F95606 F95611	Bracket suspension

Please order exit sign accessories separately



Order code	Description
Sheet steel stainless steel	
E16700M E16700M	Kit of exit sign films 
E16701M E16701M	Kit of exit sign films 

Please order additional accessories separately



Sheet steel	stainless steel	Description
F95607	F95607	Wire guard, zinc plated (surface wall mounting)





surface wall mounting





surface ceiling mounting

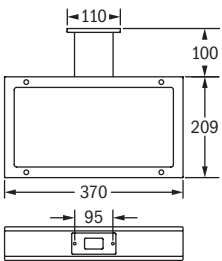

rectangular suspension

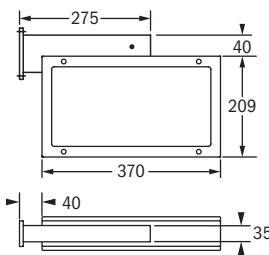

bracket suspension

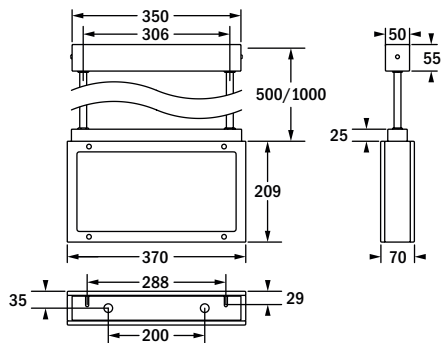

suspension rod