
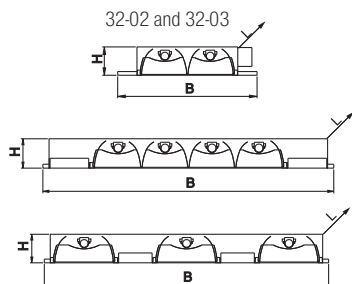


lyra | 32-02, 32-03

Recessed luminaires - T5 lamps

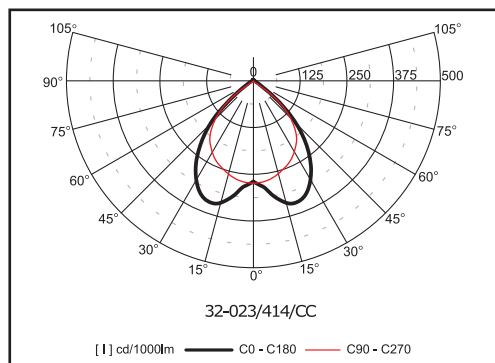

Luminaires with 24W or 54W T5 lamps by request

- ▣ - B (highly polished parabolic louvre, 60°)
- C (matted parabolic louvre, 60°)
- D (polished christmas tree louvre)
- J (matted christmas tree louvre)

Material:

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003
- louvre: highly polished or matted parabolic louvre made of a pure aluminium sheet MIRO, polished or matted christmas tree louvre

Degree of protection: IP 20

Rated voltage: 230V/50Hz

Control gear: electronic ballast, dimmable ballast by request;
the luminaires are offered also in emergency version

Mounting:

ceiling systems M600 - universal mounting (32-02)

ceiling systems M625 - universal mounting (32-03), mounting in plaster ceilings

Accessories: (must be ordered separately)

99-298 - holders for mounting in panel and plaster ceiling systems (4pcs)

Application: computer labs, large and small offices, lecture halls, stairways and halls

Code	Power	Louvre	Lamp	Cap	LxBxH (mm)	Hole cut out (mm)	Module	Kg
32-023/214/C ▣	2x14W	B, C, D, J	T5 lamp	G5	595x295x60	575x218	M 600	3,0
32-023/228/C ▣	2x28W	B, C, D, J	T5 lamp	G5	1195x295x60	1175x218	M 600	5,8
32-023/314/C ▣	3x14W	B, C, D, J	T5 lamp	G5	595x595x60	575x575	M 600	5,0
32-023/328/C ▣	3x28W	B, C, D, J	T5 lamp	G5	1195x595x60	1175x575	M 600	8,5
32-023/414/C ▣	4x14W	B, C, D, J	T5 lamp	G5	595x595x60	575x575	M 600	5,0
32-023/428/C ▣	4x28W	B, C, D, J	T5 lamp	G5	1195x595x60	1175x575	M 600	8,5
32-033/214/C ▣	2x14W	B, C, D, J	T5 lamp	G5	620x308x60	575x218	M 625	3,0
32-033/228/C ▣	2x28W	B, C, D, J	T5 lamp	G5	1245x308x60	1175x218	M 625	5,8
32-033/314/C ▣	3x14W	B, C, D, J	T5 lamp	G5	620x620x60	575x575	M 625	5,0
32-033/328/C ▣	3x28W	B, C, D, J	T5 lamp	G5	1245x620x60	1175x575	M 625	8,5
32-033/414/C ▣	4x14W	B, C, D, J	T5 lamp	G5	620x620x60	575x575	M 625	5,0
32-033/428/C ▣	4x28W	B, C, D, J	T5 lamp	G5	1245x620x60	1175x575	M 625	8,5